
ROPER RHODES®

Technical Data Sheet

PRESENCE - PSC050, PSC065, PSC080 & PSC100

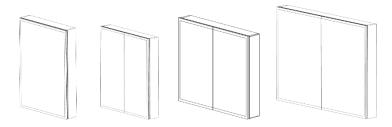

Box Contents

Presence Cabinet | 2 glass shelves | 2x Wall hanging brackets | 4x wall plugs | 4x screws | Instructions booklet

Materials

Carcass: Extruded Aluminium

Door: Double sided mirror

Glass: 3mm PVC Backed

Carcass end caps: Painted plastic

| FAQ's: | Units | PSC050 | PSC065 | PSC080 | PSC100 |
|--|-------|---|-----------------|-----------------|-----------------|
| Internal dimensions (L x W x D) | mm | 658 x 464 x 100 | 658 x 614 x 100 | 658 x 768 x 100 | 658 x 964 x 100 |
| Shelf dimensions (L x W x D) | mm | 456 x 95 x 8 | 606 x 95 x 8 | 756 x 95 x 8 | 956 x 100 x 8 |
| Max shelf spacing | mm | Customer can adjust to suit any spacing requirements | | | |
| Distance between door hinges | mm | 450 | | | |
| Individual door dimensions (L x W x D) | mm | 700 x 500 x 16 | 700 x 324 x 16 | 700 x 400 x 16 | 700 x 500 x 16 |
| Max door opening angle | 0 | 110 | | | |
| Max depth with door open | mm | 626 | 450 | 515 | 626 |
| Hanging bracket centres | mm | 464 | 614 | 768 | 964 |
| What is the thickness of the mirror glass? | mm | 3 | | | |
| Is the cabinet IP44 rated? | - | Yes – suitable for use in bathroom zone 2 | | | |
| What size fuse should I use? | - | Seek the advice of an electrician | | | |
| What is the total power consumption? | W | 36.5 | 66 | 69 | 73 |
| Does the cabinet have an energy rating? | | Yes – It has an energy rating of: A | | | |
| What is the colour of the light and the Kelvin rating? | К | 2700 - 6000 | | | |
| What is the Lumen of the LEDs?* | Lms | 2193 | 3672 | 3978 | 4386 |
| What is the wattage of the lights? | W | 21.5 | 38 | 39 | 43 |
| Where is the touch sensor/rocker switch located? | 1 | Front bottom right Front left door – bottom right | | | |
| Where is the shaver socket located? | - | Inside on the top right | | | |
| Can the LED lighting be replaced? | - | No | | | |
| Can the IR sensor be replaced? | - | No | | | |
| What is the output of the demister pad? | W | 15 | 30 | 30 | 30 |
| What are the dimensions of the demister pad? (L x W) | mm | 200 x 300 | 150 x 400 | 150 x 400 | 200 x 300 |
| How do I turn on the demister pad? | - | The demister pad will turn on when the LEDs are turned on. | | | |
| Are illuminated cabinets supplied with mains cable? | - | All illuminated cabinets are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit. | | | |

Dimensions are subject to change; customers are advised to measure actual product before commencing installation. Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

^{*}The Lumen represents the output of the LED. This may vary depending on the diffuser material i.e., glass or acrylic.

ROPER RHODES®

