TECHNICAL DATA SHEET Widcombe Doubled Ended Slipper Bathtub - BAT104


ROPER RHODES[®]

NO.	Description	Product Code	Fixings included	Gross Weight	
1	Widcombe Doubled Ended Slipper Bathtub	BAT104	YES	40KG	
2	Traditional Lion Feet (Various Finishes)	BAA101-BAA104	YES	4.4KG	



DIMENSIONS

DIAGRAMS NOT TO SCALE | ALL DIMENSIONS IN MM TOLERANCE OF \pm 5MM ALL PRODUCTS CONFORM TO BRITISH STANDARDS

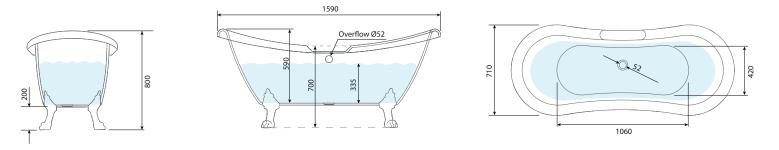

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation. **Fixing point dimensions are for guidance only. The positions of fixings must be checked when product is received.

FAQs

Q - What Trap is recommended for use with this bathtub? A - We recommend using an exposed bath trap with this bath tub. The trap will require a 1 1/2" BSP connection to connect with the waste. A range of finishes are available in the Roper Rhodes bathing collection

Q - Is this bathtub supplied with a waste?

A - No, bathtub click and chain wastes can be purchased separately from the Roper Rhodes brochure in a range of finishes.

- Q What colour is the overflow trim?
- A The bathtub is supplied with a pre drilled, neutral overflow hole.

Q - Do I need to purchase a bath tub overflow kit for this bath tub? A - Yes, an overflow and waste kit can be purchased from the Roper Rhodes bathing collection in a range of finishes.

Q - What filling methods are recommended for this bathtub A - We recommend using a deckmounted bath filler/bath shower mixer with tap shrouds.

Q - Is this bathtub supplied with feet?

A - No, traditional feet can be purchased separately from the Roper Rhodes brochure in a range of finishes.

Q - How heavy is this bathtub?

A - The unfilled weight is 31KG, the filled weight is 226KG. A structural engineer should be consulted to ensure that your floor is strong enough to support the weight of a filled bathtub.

Q - What material is used to make this bathtub?

A - This bathtub is made from a double skin of 3.2mm acrylic, each skin is reinforced by a double layer of insulating fibreglass and resin. The bottom of the bath tub is reinforced using a 6mm thick MDF base board.

- Q Are the feet adjustable?
- A Yes, the feet are adjustable by a range of over 30mm.

Q - What is the overall capacity of the bathtub?

- A 195 Litres.
- Q Are the tap holes pre drilled?
- A Our bath tubs are all supplied with undrilled tap decks

All of our bath tubs conform with BS EN 14156 Class 1 & Class 2

Customer Services: Roper Rhodes Ltd | Brassmill Lane Trading Estate | Bath | BA1 3JF Tel: 01225 303 900 | Fax: 01225 448 877 | Email: sales@roperrhodes.co.uk | Web: www.roperrhodes.co.u