

Technical Datasheet



Façade-U Cabinets

Box Contents

Façade Cabinet | 2 smoked glass shelves | 2 Mirror Side Panels | Fixing Kit | Instructions booklet.
Recessed and surface mounted installation options.

FAQ

	Units	FCC050U	FCC060U	FCC080U	FCC100U
Recess dimensions (W x H x D)	mm	440 x 648 x 101	600 x 648 x 101	800 x 648 x 101	1000 x 648 x 101
Internal dimensions (W x H x D)	mm	410 x 555 x 98	570 x 555 x 98	770x 555 x 98	970 x 555 x 98
Shelf dimensions (W x H x D)	mm	404 x 5 x 95	564 x 5 x 95	764 x 5 x 95	964 x 8 x 95
Max shelf spacing	mm	250	250	250	250
Distance between door hinges	mm	370	370	370	370
Individual door dimensions (W x H x D)	mm	440 x 662 x 16	298x 662 x 16	398 x 662 x 16	498 x 662 x 16
Door opening angle	°	90	90	90	90
Depth with door fully open	mm	552	412	512	612
Hanging bracket centres	mm	390	550	750	950
What is the thickness of the mirror glass?	mm	3+3mm	3+3mm	3+3mm	3+3mm
What size fuse should I use?	-	Seek the advice of an electrician			
Where is the Touch Sensor located?	-	Lower right corner	Centre		
Can the LED lighting be replaced?	-	No			
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.			
Are illuminated cabinets/mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.			

Technical Datasheet

Façade-U Cabinets

Electrical Specification


Product Code	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
FCC050U	220-240V 50Hz	12V DC LED Lamp	27.0	15.0	200x300	12.0	900	F	6000	85	IP44	Class I
FCC060U	220-240V 50Hz	12V DC LED Lamp	42.0	30.0	150x400	12.0	900	F	6000	85	IP44	Class I
FCC080U	220-240V 50Hz	12V DC LED Lamp	42.0	30.0	200x300	12.0	900	F	6000	85	IP44	Class I
FCC100U	220-240V 50Hz	12V DC LED Lamp	42.0	30.0	200x300	12.0	900	F	6000	85	IP44	Class I

Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.


Technical Datasheet

FCC050U

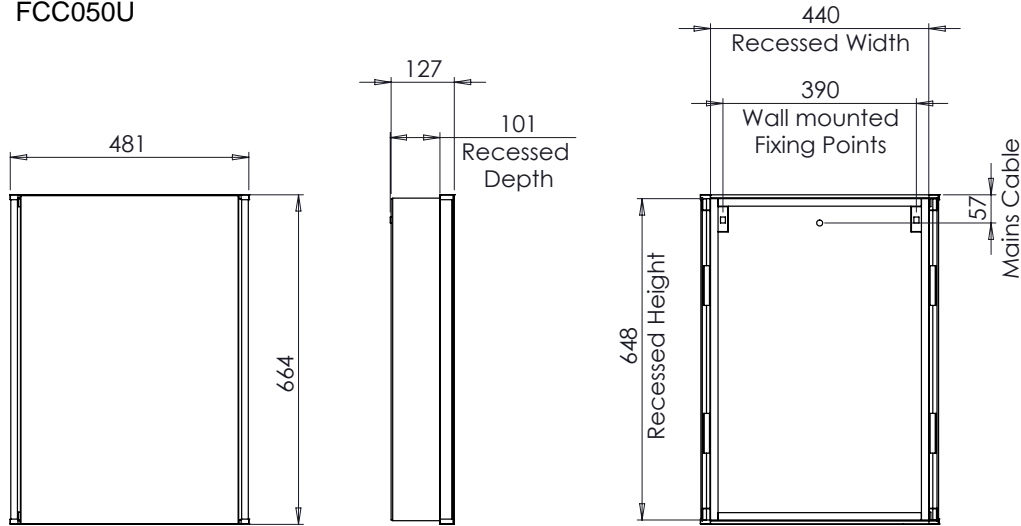

Recess dimensions are for guidance only. We recommend measuring the product dimensions and adding a minimum of 5mm to provide some tolerance during installation.


FCC060U

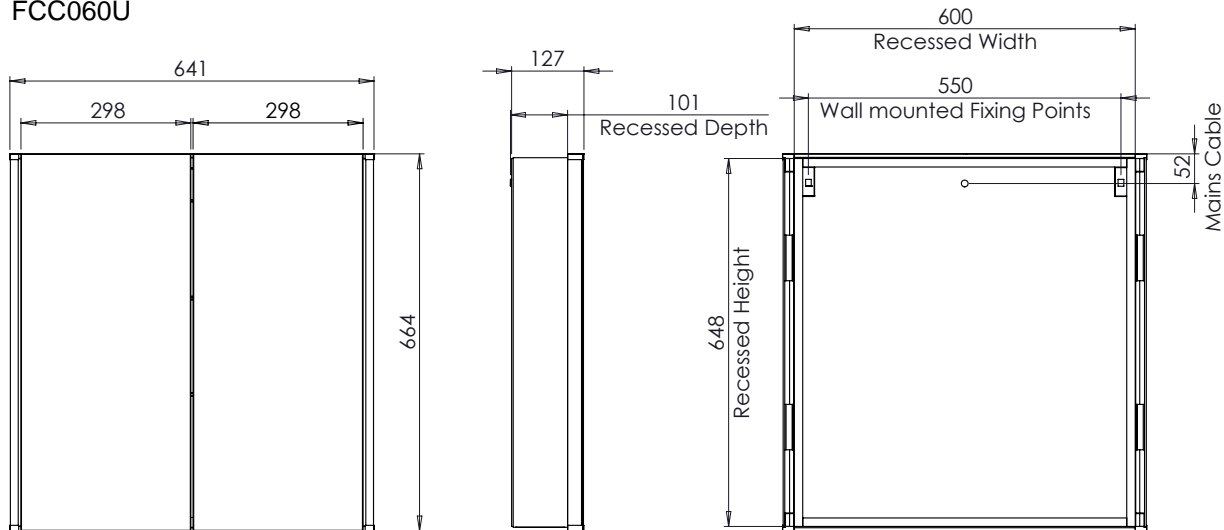

Recess dimensions are for guidance only. We recommend measuring the product dimensions and adding a minimum of 5mm to provide some tolerance during installation.


Technical Datasheet

FCC080U

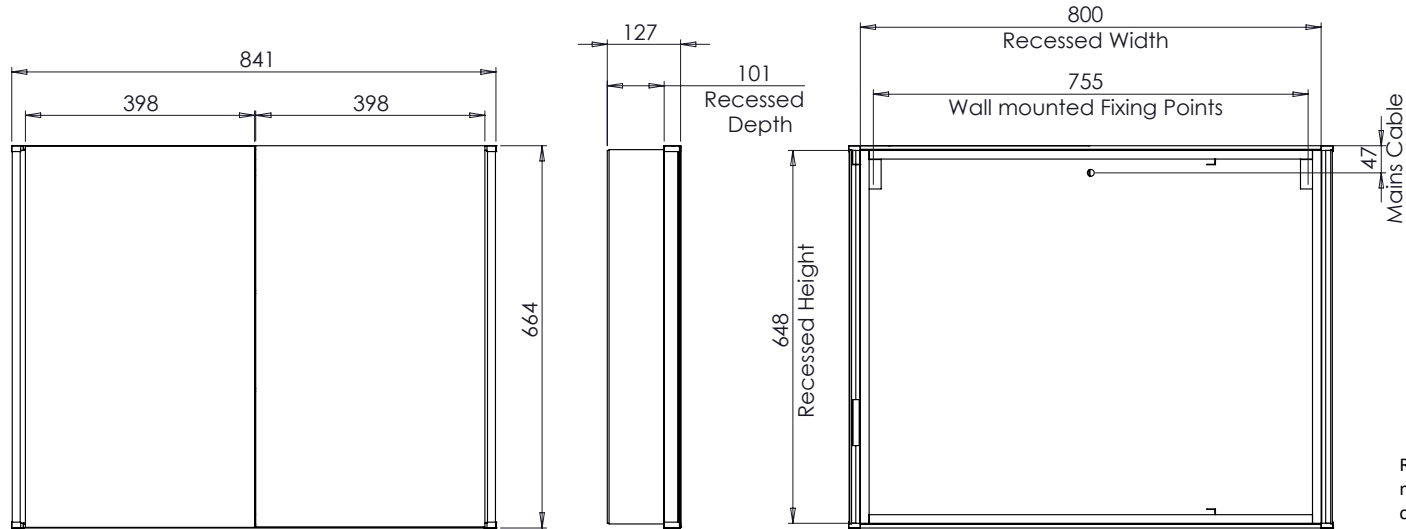

Recess dimensions are for guidance only. We recommend measuring the product dimensions and adding a minimum of 5mm to provide some tolerance during installation.

FCC100U

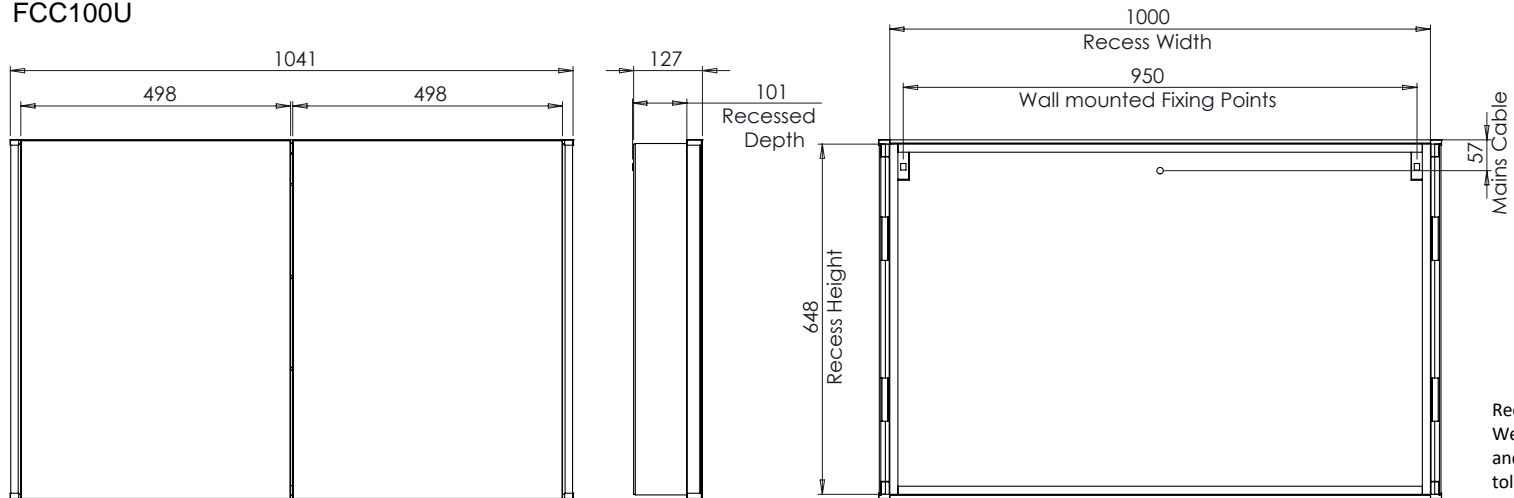

Recess dimensions are for guidance only. We recommend measuring the product dimensions and adding a minimum of 5mm to provide some tolerance during installation.