

TECHNICAL DATA SHEET

LUCENT CABINETS

BOX CONTENTS: Lucent Cabinet | Instructions booklet | 2 x Smoked Glass Shelves | 1x Wall Bracket | Fixing Kit

Recessed and surface mounted installation options.

FAQ's	Units	LTC050 LTC050-XX	LTC065 LTC060-XX	LTC080 LTC080-XX
Recess dimensions (W x H x D)	mm	473 x 623 x 85	573 x 623 x 85	773 x 623 x 85
Internal dimensions (W x H x D)	mm	440 x 530 x 90	540 x 530 x 90	740 x 530 x 90
Shelf dimensions (W x H x D)	mm	434 x 5 x 70	534 x 5 x 70	734 X 5 x 70
Max shelf spacing	mm	360		
Distance between door hinges	mm	416		
Individual door dimensions (W x H x D)	mm	466 x 616 x 6	(2x) 282 x 616 x 6	(2x) 382 x 616 x 6
Door opening angle	°	90		
Depth with door fully open	mm	578	394	494
Hanging bracket dimensions	mm	430	530	730
What is the thickness of the mirror glass?	mm	3+3		
Does the cabinet come with side panels?	-	Yes. Cabinet comes with Mirror Side Panels.		
Where is the switch sensor located?	-	Touch Bar underneath the cabinet		
Can the LED lighting be replaced?	-	No		
Can the switch sensor be replaced?	-	No		
What size fuse should I use?		Seek advice from an electrician		
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.		
Are illuminated cabinets/mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.		

Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Recess dimensions are for guidance only. We recommend measuring the product dimensions and adding a minimum of 5mm to provide some tolerance during installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.


TECHNICAL DATA SHEET

ELECTRICAL SPECIFICATION

	Input Voltage	Lamp Type	Total Wattage (W)	LEDs (W)	Shaver Socket (W)	UBS Port (W)	Demist (W)	Demist Size (mm)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
LTC050	220-240V 50Hz	12V DC LED Lamp	93	23	20	30	20	200*300	1656	G	3000-6000	85	IP44	Class I
LTC065	220-240V 50Hz	12V DC LED Lamp	115	25	20	30	40	200*300 (x2)	1800	G	3000-6000	85	IP44	Class I
LTC080	220-240V 50Hz	12V DC LED Lamp	119	29	20	30	40	200*300 (x2)	2088	G	3000-6000	85	IP44	Class I

TECHNICAL DRAWINGS

LTC050

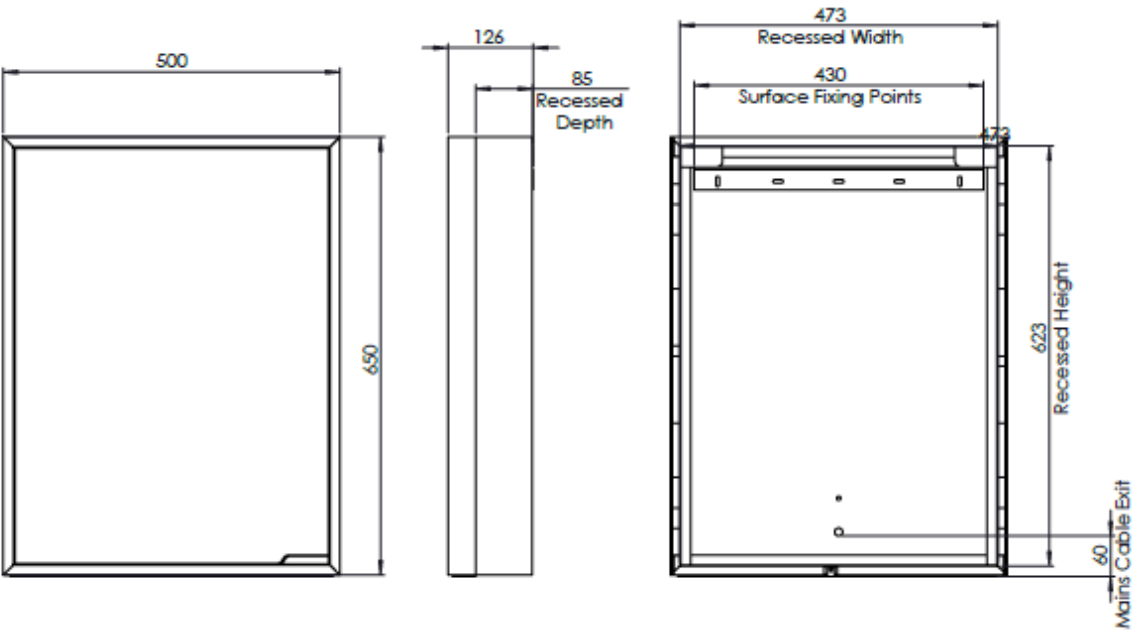


MATERIALS

6mm Glass Doors, PVC Backed
MFC Dark Grey Melamine Carcass and Back Panel
Aluminium Frame
Polycarbonate Diffuser

TECHNICAL DATA SHEET

LTC060

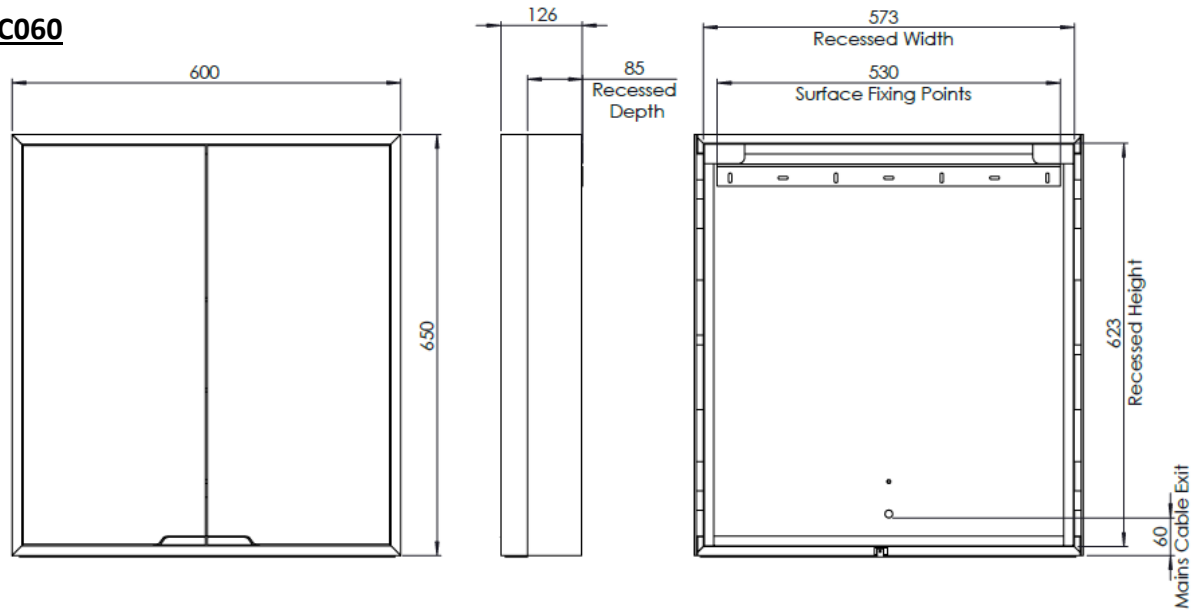

LTC080

