

# Technical Datasheet

# TAVISTOCK

## Render Cabinets

### Box Contents

Render Cabinet | 2 smoked glass shelves | 2 Mirror Side Panels | Fixing Kit | Instructions booklet.  
Recessed and surface mounted installation options.

### FAQ

	Units	RMC050	RMC060	RMC080
Recess dimensions (W x H x D) *	mm	460 x 648 x 101	560 x 648 x 101	760 x 648 x 101
Internal dimensions (W x H x D)	mm	429 x 555 x 98	529 x 555 x 98	729 x 555 x 98
Shelf dimensions (W x H x D)	mm	425 x 5 x 95	525 x 5 x 95	725 x 6 x 95
Max shelf spacing	mm	250	250	250
Distance between door hinges	mm	370	370	370
Individual door dimensions (W x H x D)	mm	460 x 664 x 16	280 x 664 x 16	380 x 664 x 16
Door opening angle	°	90	90	90
Depth with door fully open	mm	540	400	500
Hanging bracket centres	mm	410	510	710
What is the thickness of the mirror glass?	mm	3+3mm	3+3mm	3+3mm
What size fuse should I use?	-	Seek the advice of an electrician		
Where is the Touch Sensor located?	-	Lower right corner	Centre	
Can the LED lighting be replaced?	-	No		
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.		
Are illuminated cabinets/mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.		

#### \* Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Recess dimensions are for guidance only. We recommend measuring the product dimensions and adding a minimum of 5mm to provide some tolerance during installation.
- Fixing point dimensions are for guidance only. The positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.

# Technical Datasheet


## Render Cabinets

### Electrical Specification

Product Code	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
RMC050	220-240V 50Hz	12V DC LED Lamp	27.0	15.0	200x300	12.0	900	F	6000	85	IP44	Class I
RMC060	220-240V 50Hz	12V DC LED Lamp	42.0	30.0	150x400	12.0	900	F	6000	85	IP44	Class I
RMC080	220-240V 50Hz	12V DC LED Lamp	42.0	30.0	200x300	12.0	900	F	6000	85	IP44	Class I


### Technical Drawings

#### RMC050

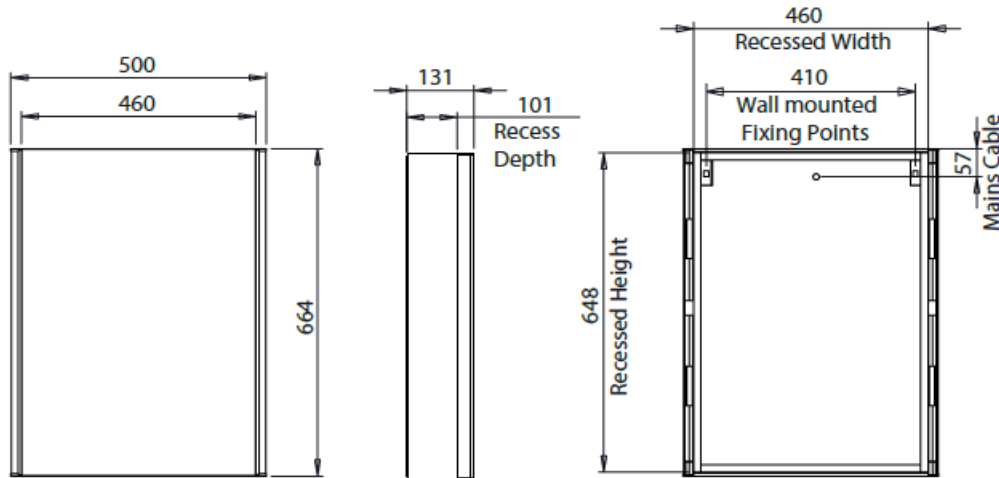

# Technical Datasheet

## RMC060

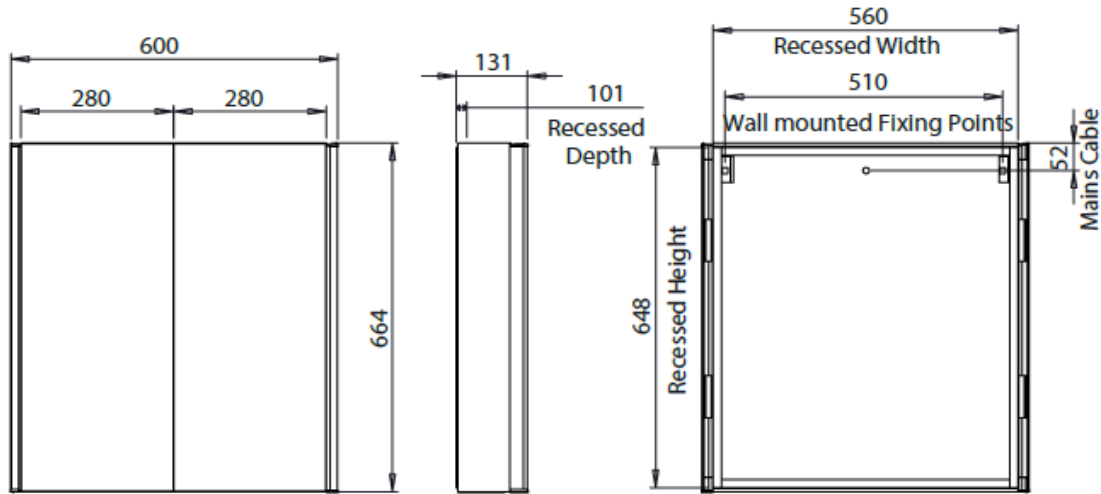

## RMC080

