
Technical Data Sheet

CONTOUR SOLID SURFACE WORKTOP

What's in the box: 1x CNWT5S.x / CNWT6S.x

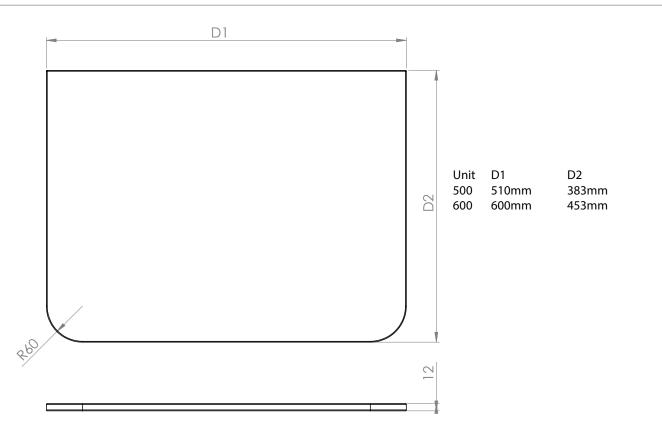

Materials

Basin: Isocast

Diagrams not to scale All dimensions in mm Tolerance of +/-5mm

Dimensions are subject to change, customers are advised to measure actual product before commencing installation. *Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

Solid Surface Information

Has many names including:

- Corian
- LG Hi-macs

A homogenous compound mixture of polyester and aluminium trihydrate (derived from a natural Bauxite ore). Basically the same material all the way through so can be cut and sanded back to perfect finishes. Aluminium trihydrate is Moulded, vacuum treated and then finished by hand to create a perfectly smooth matt finish which is highly dimensionally accurate. Can be sanded and refinished should any stains occur due to misuse. Can be patch repaired by simple sanding back since material is homogenous (same all the way through).

Material Benefits:

- Point impacts (255g ball dropped from 610mm)
- Stain resistant
- Colourfast
- Temperature resistance

FAQs

- Q: Are the worktops pre-cut for tap and waste hole?
- Q: Are the worktops reversible?
- Q: Can I use these worktops on other ranges?

- A: No, they are plain and should be cut according to basin / tap selected. Instruction supplied with worktops to detail
- A: No, the top (main finish) is polished. Underside is unfinished.
- A: They are designed to be perfect fit to R2 range but it is possible to cut down and repolish edges if required.