
Technical Data Sheet

TAVISTOCK

CONDUCT - CO44AL

Whats in the box: 1x Cabinet + Fixings + 2 Glass Shelves

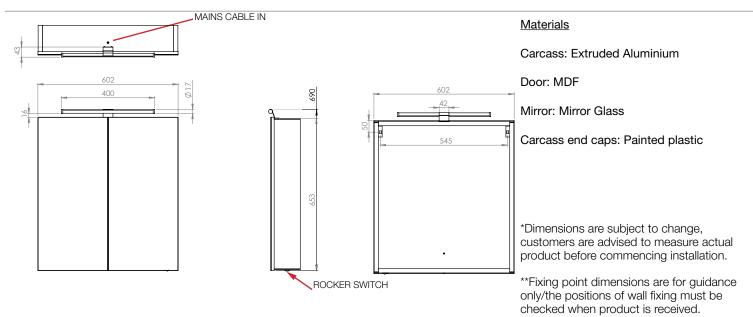

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

FAQ's

Q: Internal dimensions (Width x Depth).	A: 564 x 100mm
Q: Shelf dimensions (Length x Width x Depth).	A: 556 x 95 x 5mm

Q: Max shelf spacing. A: 2 shelves with adjustable increments of 70mm. Up to separation of

280mm

Q: Distance between hinge centres. A: 400mm

Q: Door dimensions (Height x Width x Depth). A: 658 x 300 x 15mm.

Q: Door opening angle. A: 135°

Q: Depth with door fully open. A: 412mm

Q: Hanging brackets centres. A: 545mm

Q: What is the thickness of the cabinet door glass? A: 3m.

Cabinets with painted finish do not have a RAL code as the colour is unique to Tavistock.

Q: Is the cabinet IP44 rated?

A: Yes, it can be placed in zone 2 and outside zones.

Q: What size fuse should I use?

A: We cannot recommend fuse size as each installation is different. A

qualified Electrician should be consulted in accorance with IEE 7671.

Q: What is the total power consumption? A: 6W.

Q: Does the cabinet have an energy rating?

A: The energy rating of LED's used in this product are rated as 'A'.

Q: What is the colour of the light and the Kelvin rating? A: 6500k Cool White.

Q: Can the LED lighting be replaced?

A: Yes, see the last page of instructions available for this mirror.

Q: Can the IR sensor/rocker switch be repositioned? A: No.

All Illuminated cabinets are supplied with approximately 500mm of mains cable. This can be removed for the customer to make their own connection to their mains supply. There is ample storage for excess cable in the back of the unit.