

Technical Data Sheet

1000mm Wall Hung Frame and Cistern with Debut Wall Hung WC and Seat

ROPER RHODES®
TRADE SOLUTIONS


No.	Description	Product Code	Fixings Included?	Gross Weight
1	1.0m Wall Hung Frame and Cistern	TR9015	Yes	15.6KG
2	Debut Wall Hung WC	DWHPAN	Yes	25KG
3	Soft Close Seat	DSCTS2	Yes	2.6KG



KEY FEATURES

- adjustable depth 167-215mm
- adjustable height legs (up to 70mm adjustment)
- 6/3 litre adjustable flush option
- side entry 1/2" inlet valve
- front and top access panel
- 0.1-10.0 bar working pressure range
- flushpipe >90° for neat installation
- polystyrene insulation jacket

DIMENSIONS

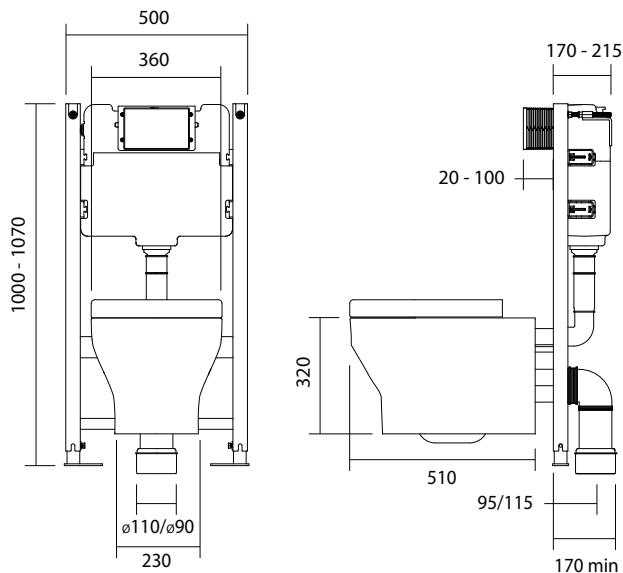

DIAGRAMS NOT TO SCALE | ALL DIMENSIONS IN MM TOLERANCE OF ± 5 MM
ALL PRODUCTS CONFORM TO BRITISH STANDARDS

FAQs

Q - Is the frame supplied with a flush plate?

A - No, this is purchased separately

Q - Can the flush plate be mounted on top?

A - Yes, the flush plate can be mounted on the front and top of the cistern

Q - Can the waste pipe be routed out to the side of the frame?

A - Yes, with a minimum distance of 170mm from wall to the front of the frame.

Q - What is the flushing volume of the cistern?

A - The cistern has full flush of 6 litres and reduced flush of 3 litres.

Q - What standard has the frame been tested to?

A - All wall hung WC frames are tested against BS EN 997 - static loading of 400kg and dynamic loading of 200kg for 50,000 cycles - simulating 15 years of usage.

Q - What is the minimum flush volume achievable using this frame?

A - The flush valve adjustment detailed in the instructions gives a minimum full flush level of 4.5L.

Q - Where can I find more information?

A - Use the individual TDS for each product (TR9015, DWHPAN and DSCTS2) for more information.

Please note the depth remaining of the protective shroud once cut must be a minimum of 20mm.

This means that the finished surface must be a minimum of 35mm from the front of the frame as shown, right.

