



HAMPTON MIRROR FITTING INSTRUCTIONS Please retain for future reference

Before you start

Wall plugs supplied are only suitable for solid stone / brick walls. For PLasterboard walls use specialist wall plugs, if in any doubt please consult an expert.

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is recommended. Beware of hidden pipes or cables. Take care when drilling tiled surfaces as the drill might slip. Use a piece of masking tape to prevent the drill from wandering.

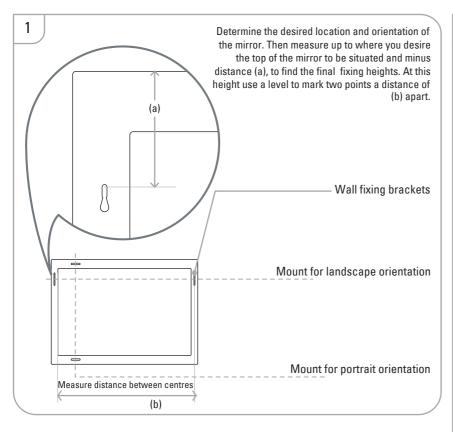

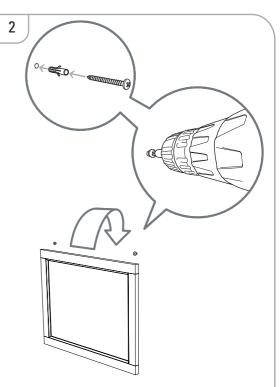

Drill two holes in the marked positions using a 8mm drill bit to a depth of 55mm. Insert the Wall plug supplied and screw in the fixing screw, leaving surfficient head showing to slide into the mirror wall brackets.

Furniture Aftercare Instructions As with all wooden furniture, this product should be treated with care.

 We recommend...
 Please DO NOT...

 Wipe away any water splashes or condensation after use. Excessive exposure to water will deteriorate the furniture.
 Do not scrub or scour

 All bathrooms should be well ventilated with a suitable extractor fan.
 Do not use abrasive cleaning agents

 Clean with a soft damp cloth only.
 Do not use abrasive cleaning agents

Use a wax free polish if one must be used.

For removal of lime scale deposits use a suitable proprietary cleaner. If necessary test on an inconspicuous area first.

Replacement components - Should you require any replacement components for this product please contact Roper Rhodes using the contact details below.

Customer Services, Roper Rhodes Ltd, Brassmill Lane Trading Estate, Bath, BA1 3JF TEL:01225 303 900 | FAX: 01225 448 877 Email: sales@roperrhodes.co.uk | Web: www.roperrhodes.co.uk