

Technical Data Sheet

Joy Shower Systems

ROPER RHODES®
TRADE SOLUTIONS

No.	Description	Codes	Fixings Included
1	Joy Concealed Dual Function Shower System with Shower Head and Handset	TR3011	YES





Chrome Plated

**FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL FLOW
RATE MAY VARY DEPENDING ON DOMESTIC
SUPPLY AND ACCESSORIES**

Inlet Pressure	Flow Rate (l/min)
0.5bar	8.00
1bar	9.00
2bar	13.50
3bar	17.50

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

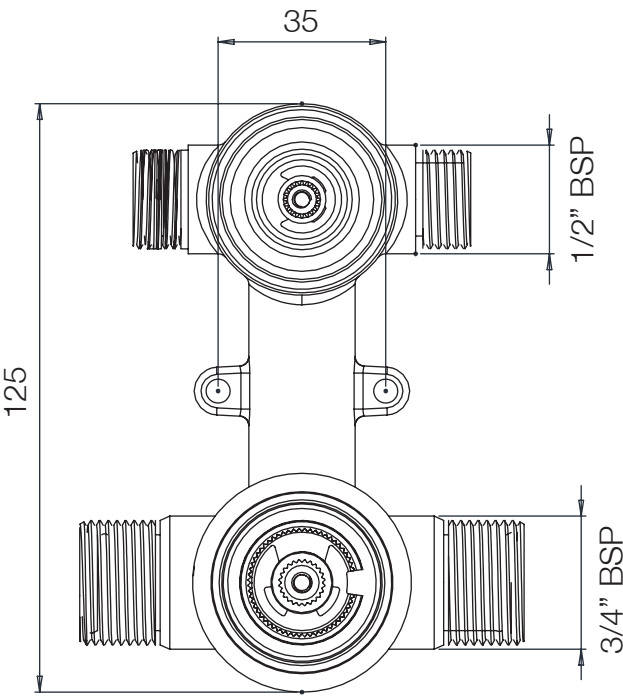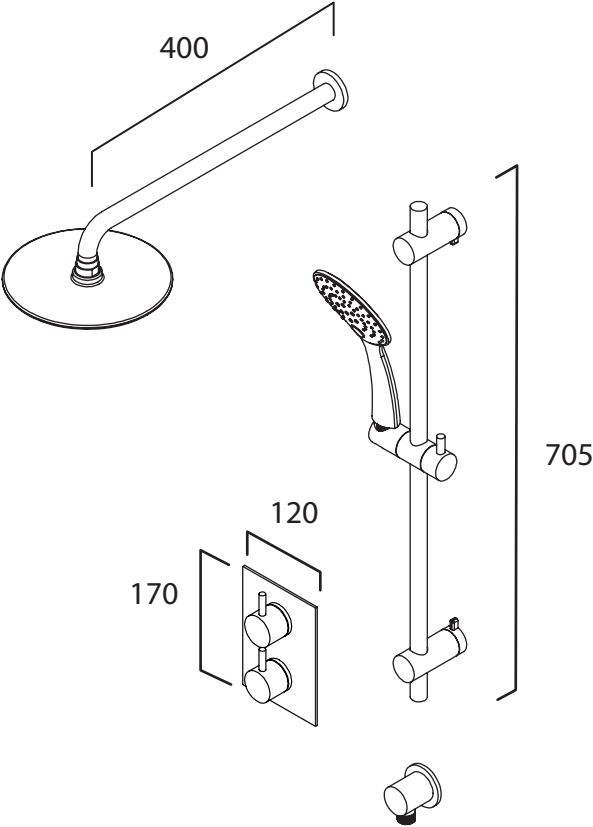

**NOTE: VALVE TO BE RECESSED 80-100mm
FROM FINISHED WALL SURFACE**

FAQs

- How tall is the riser rail?** 705mm - the fixing brackets are adjustable and have no fixed distance.
- How long is the shower hose?** 1.5m
- What is the recommended minimum pressure for the valve?** 1.0bar
- What is the valve inlet connection size?** 3/4" BSP
- What is the valve outlet connection size?** 1/2" BSP
- What is the handle material?** Chrome-plated brass

Components

- Riser** - Stainless Steel
- Valve** - Chrome Plated Brass
- Cover Plates** - Stainless Steel
- Slider** - Chrome Plated ABS