


TECHNICAL DATA SHEET

LEVITATE MIRRORS

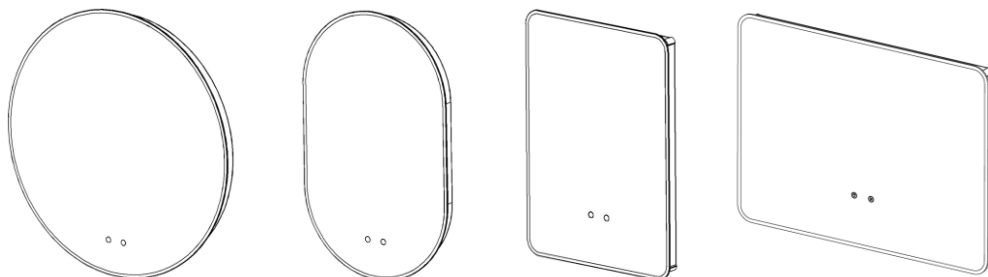

BOX CONTENTS:

Levitate Mirror | Instructions booklet | Fixings – WFKMC 1

FAQ's

	Units	LVM60C	LVM80C	LVM40P	LVM50P	LVM060	LVM080	LVM040	LVM050
Can the mirror be hung landscape?	-	No						Yes	
Does this mirror have frosting?	-	Yes, 10mm wide							
What is the thickness of the mirror glass?	mm	4mm							
Is the mirror IP44 rated?	-	Yes – Suitable for use in bathroom zone 2							
Where is the touch sensor located?	-	At the bottom, centre of mirror							
How do I turn on the demister pad?	-	Press the right touch sensor with the demister icon, touch sensor will turn red when on. Demister automatically turns off after 30 minutes. See user manual for more information.							
Where is the shaver socket located?	-	Bottom of mirror when LVM080 when hung landscape, and when all other mirrors are hung portrait							
Can the LED lighting be replaced?	-	No							
What is the shaver socket rated wattage?	W	18							
Can the touch sensor be replaced?	-	Yes							
What size fuse should I use?	-	Seek the advice of an electrician							
Are illuminated mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.							

TECHNICAL DATA SHEET



ELECTRICAL SPECIFICATION

	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)*	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
LVM040	220-240V 50Hz	12V DC LED Lamp	57.5	13.2	200*300	26.3	2484	F	3000-6000	80	IP44	Class II
LVM050	220-240V 50Hz	12V DC LED Lamp	67.5	19.7	280*320	29.8	2448	F	3000-6000	80	IP44	Class II
LVM060	220-240V 50Hz	12V DC LED Lamp	73.9	23.7	300*350	32.2	2952	F	3000-6000	80	IP44	Class II
LVM080	220-240V 50Hz	12V DC LED Lamp	70.6	20.4	200*450	32.2	2952	F	3000-6000	80	IP44	Class II
LVM40P	220-240V 50Hz	12V DC LED Lamp	52.9	11.3	200*250	23.6	2160	F	3000-6000	80	IP44	Class II
LVM50P	220-240V 50Hz	12V DC LED Lamp	64.8	19.7	280*320	27.1	2268	F	3000-6000	80	IP44	Class II
LVM60C	220-240V 50Hz	12V DC LED Lamp	53.6	13.5	φ280	22.1	1944	F	3000-6000	80	IP44	Class II
LVM80C	220-240V 50Hz	12V DC LED Lamp	70.2	21.2	φ350	31.0	2664	F	3000-6000	80	IP44	Class II


TECHNICAL DRAWINGS

Please note:


- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- *The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.

TECHNICAL DATA SHEET


LVM60C

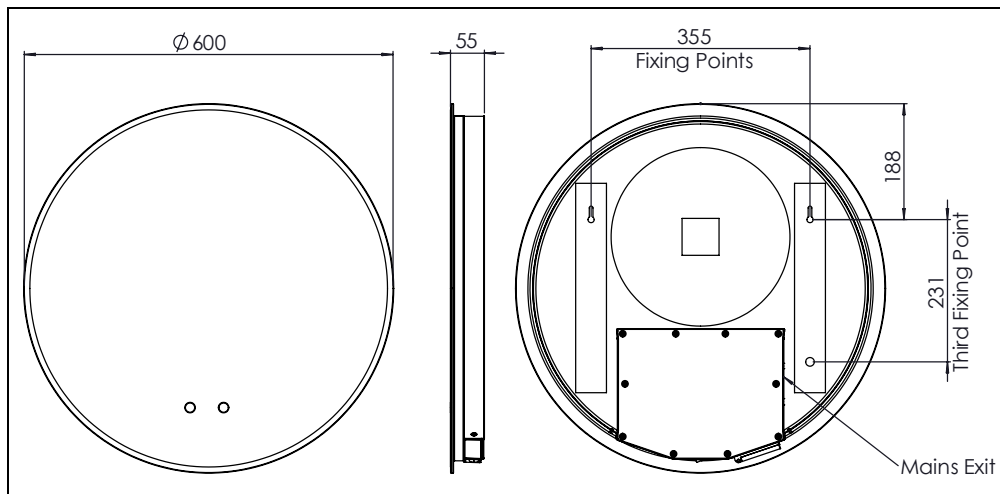


LVM80C

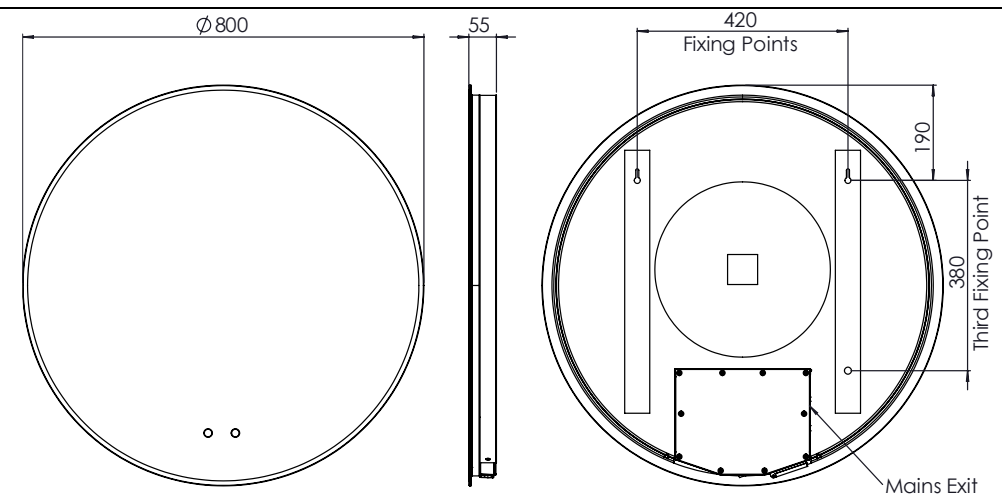

LVM050

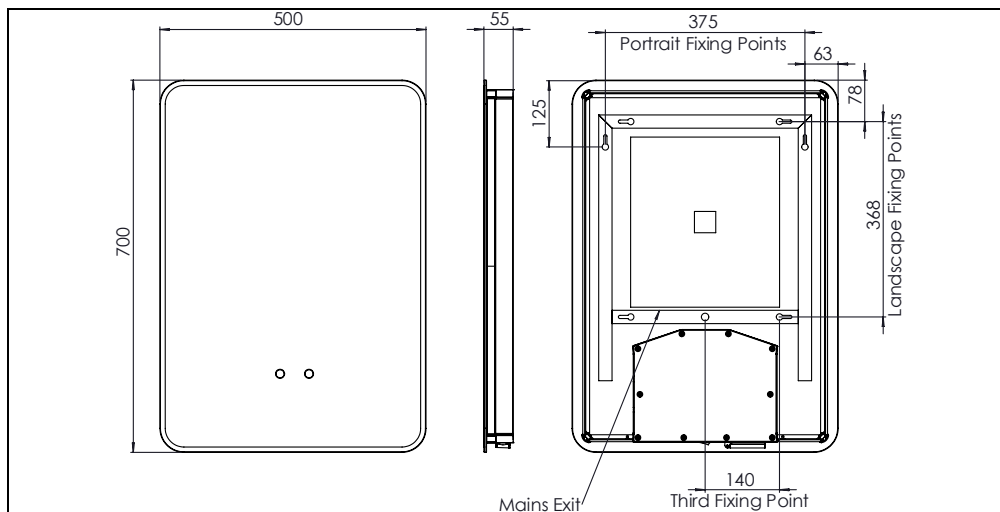


LVM50P

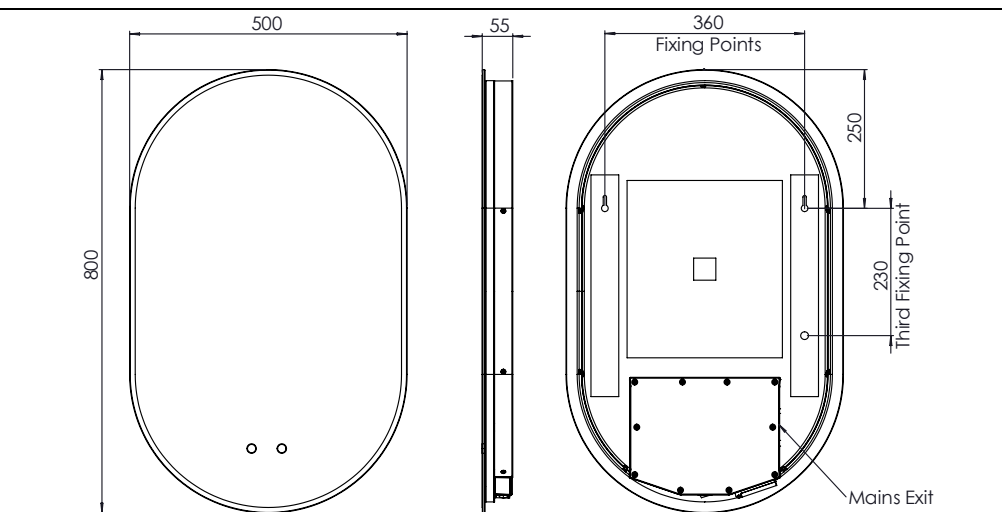


TECHNICAL DATA SHEET


LVM40P

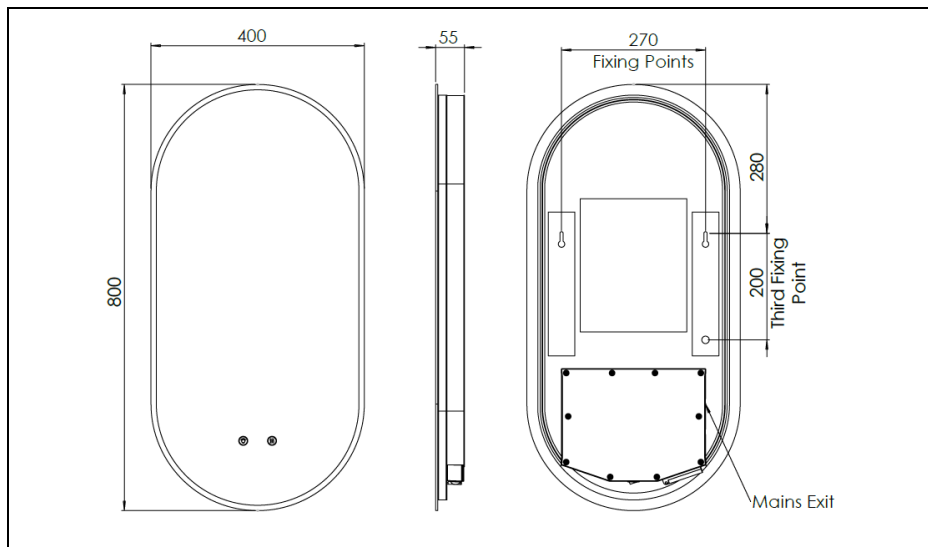

LVM040

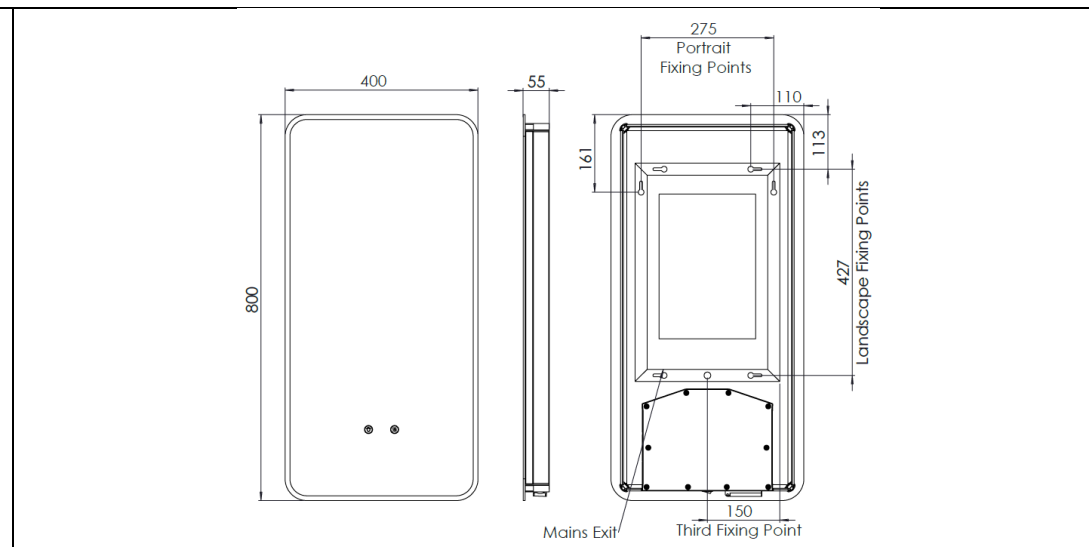

LVM060

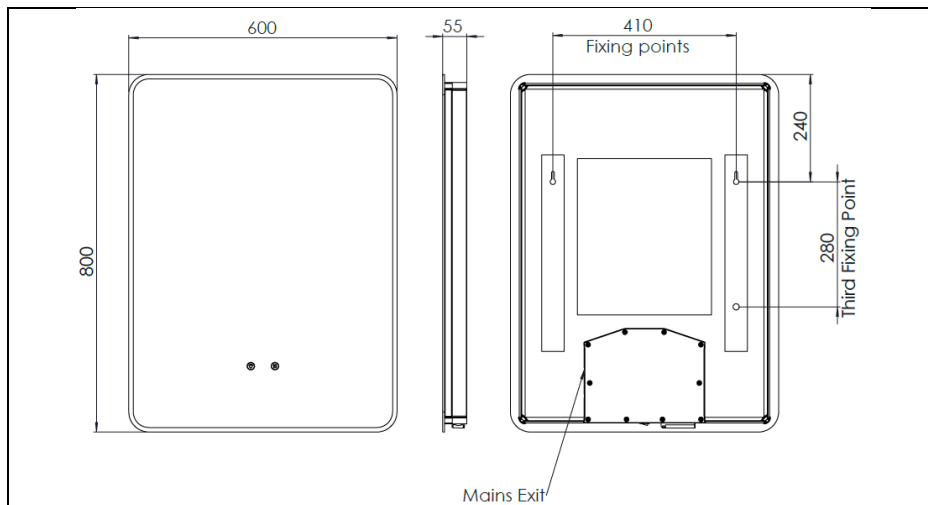

LVM080

