

LOOP MIRRORS

BOX CONTENTS:

LOOP Mirror | VM03 Vanity Mirror with charging Stand and USB C Cable | Instructions booklet | Fixing Kit (2 Wall Brackets and Fixing Screws)

FAQ's	VMM60CUBL	VMM80CUBL	VMM60CUBR	VMM80CUBR	VMM60CUAM	VMM80CUAM
Can the mirror be hung landscape?	NA					
Does this mirror have frosting?	No					
What is the thickness of the mirror glass?	4mm					
Where is the switch sensor located?	Bottom Centre					
Is this mirror IP44 Rated?	Yes – Suitable for use in bathroom zone 2					
Can the LED lighting be replaced?	No. The LEDs are not replaceable to maintain the integrity of the product's resistance to moisture ingress.					
Can the switch sensor be replaced?	Yes					
What size fuse should I use?	Seek the advice of an electrician					
How do I turn ON the demister pad?	The demister pad will turn ON/OFF when the mirror lights are turned ON/ OFF. To activate or deactivate the demister pad independently, press the right touch sensor with the demister icon. When the demister sensor icon light is ON the antifog function will be active. Demister automatically turns off after 60 minutes. See user manual for more information.					
Where is the demister pad located?	Please refer to technical drawings for demister pad location.					
Are illuminated cabinets/mirrors supplied with mains cable?	All illuminated mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.					

TECHNICAL DATA SHEET

ROPER RHODES®

ELECTRICAL SPECIFICATION

	Input Voltage	Lamp Type	Total Wattage (W)	Demist (W)	Demist Size (mm)	LEDs (W)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class	Max LED Output (lm)	Max Product Output (lm)
VMM60CUAM	220-240V 50Hz	12V DC LED Lamp	31.0	14.0	ø300	17.0	F	2700-6000	85	IP44	Class I	1700	1356.30
VMM60CUBL	220-240V 50Hz	12V DC LED Lamp	50.0	14.0	ø300	36.0	F	2700-6000	85	IP44	Class I	3600	3251.60
VMM60CUBR	220-240V 50Hz	12V DC LED Lamp	50.0	14.0	ø300	36.0	F	2700-6000	85	IP44	Class I	3600	3251.60
VMM80CUAM	220-240V 50Hz	12V DC LED Lamp	44.0	22.0	ø400	21.8	F	2700-6000	85	IP44	Class I	2180	1643.10
VMM80CUBL	220-240V 50Hz	12V DC LED Lamp	69.0	22.0	ø400	46.8	F	2700-6000	85	IP44	Class I	4680	1827.50
VMM80CUBR	220-240V 50Hz	12V DC LED Lamp	69.0	22.0	ø400	46.8	F	2700-6000	85	IP44	Class I	4680	1827.50

Please note:


- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- We recommend to position the wall brackets at the measured distance minus 5mm to give some tolerance on hanging the mirror.

MATERIALS


- 4mm Glass, PVC Backed
- Steel Back Cover
- Aluminium Frame
- Silicon LED Diffuser

TECHNICAL DRAWINGS

VMM60CUBL / VMM60CUBL

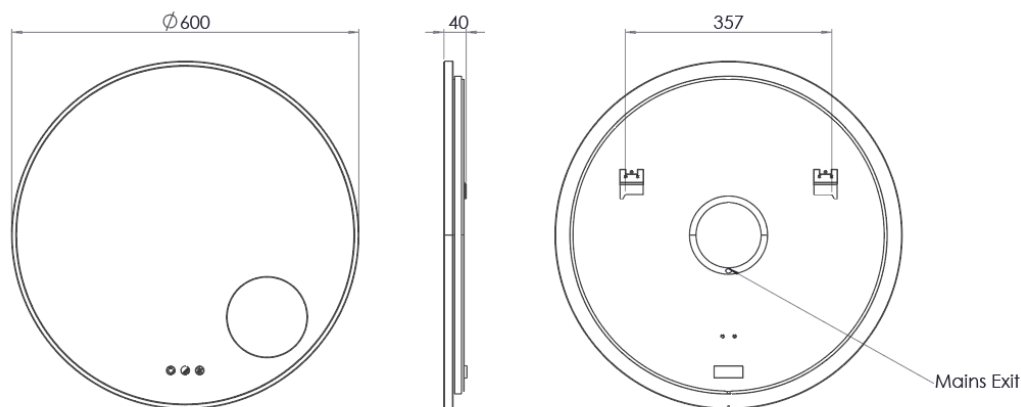


VMM80CUBL / VMM80CUBL

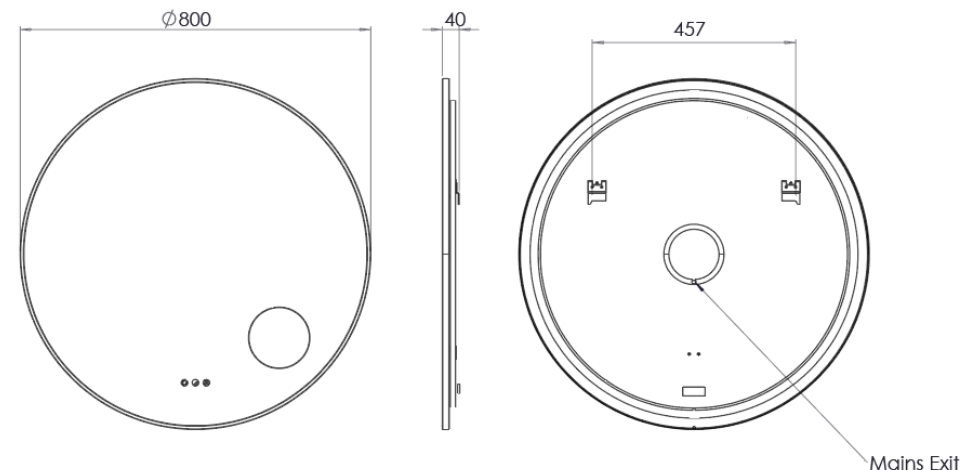

TECHNICAL DATA SHEET

ROPER RHODES®

VMM60CUAM / VMM60CUAM

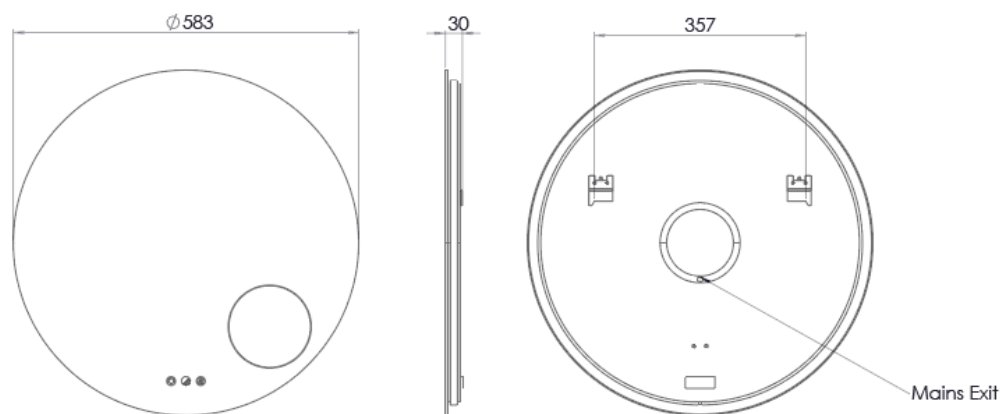

VMM80CUAM / VMM80CUAM

