

Technical Data Sheet

SERENITY

Box Contents:

Serenity Mirror | Instructions booklet | Fixing Kit

FAQ's:

FAQ's:	Units	SNM050	SNM060	SNM50P	SNM50A	SNM60C	SNM80C
Can the mirror be hung landscape?	-	Yes				NA	
What is the thickness of the mirror glass?	mm	4					
Is the mirror IP44 rated?	-	Yes – Suitable for use in bathroom zone 2					
What size fuse should I use?	-	Seek the advice of an electrician					
Where is the IR sensor located?	-	Front Centre Bottom					
Can the LED lighting be replaced?	-	No**					
Can the IR sensor be replaced?	-	Yes					
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.					
Are illuminated mirrors supplied with mains cable?	-	All illuminated mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.					

Please Note:

Dimensions are subject to change; customers are advised to measure actual product before commencing installation.

Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

*The Lumen represents the output of the LED. This may vary depending on the diffuser material i.e., glass or acrylic.

**The LEDs are not replaceable to maintain the integrity of the product's resistance to moisture ingress

***All wattage values have a tolerance of +/- 10%


ELECTRICAL SPECIFICATION

	Input Voltage	Lamp Type	Total Wattage (LED & Demist)***	Demist (W)***	Demist Size (mm)	LEDs (W)***	LED (lm)*	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
SNM050	220-240V 50Hz	12V DC LED Lamp	37.5	15.7	275*250	21.8	2124	F	3000-6000	80	IP44	Class II
SNM060	220-240V 50Hz	12V DC LED Lamp	47.2	21.2	300*300	26.1	2592	F	3000-6000	80	IP44	Class II
SNM50P	220-240V 50Hz	12V DC LED Lamp	35.3	13	200*300	22.3	2196	F	3000-6000	80	IP44	Class II
SNM50A	220-240V 50Hz	12V DC LED Lamp	44.2	19.6	200*450	24.6	2412	F	3000-6000	80	IP44	Class II
SNM60C	220-240V 50Hz	12V DC LED Lamp	9	8.3	250*150	17.5	1656	F	3000-6000	80	IP44	Class II
SNM80C	220-240V 50Hz	12V DC LED Lamp	41.0	16.9	250*300	24.1	2376	F	3000-6000	80	IP44	Class II


TECHNICAL DRAWINGS

MATERIALS: 4mm Cooper Free Glass, PVC Safety Film, Aluminium Hanging Brackets, Silicon Diffuser, ABS Electrical Box.


SNM050

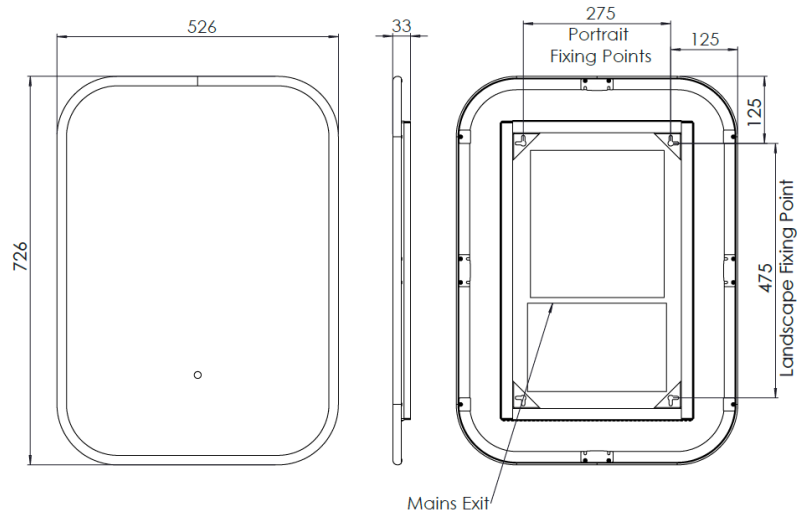


SNM060

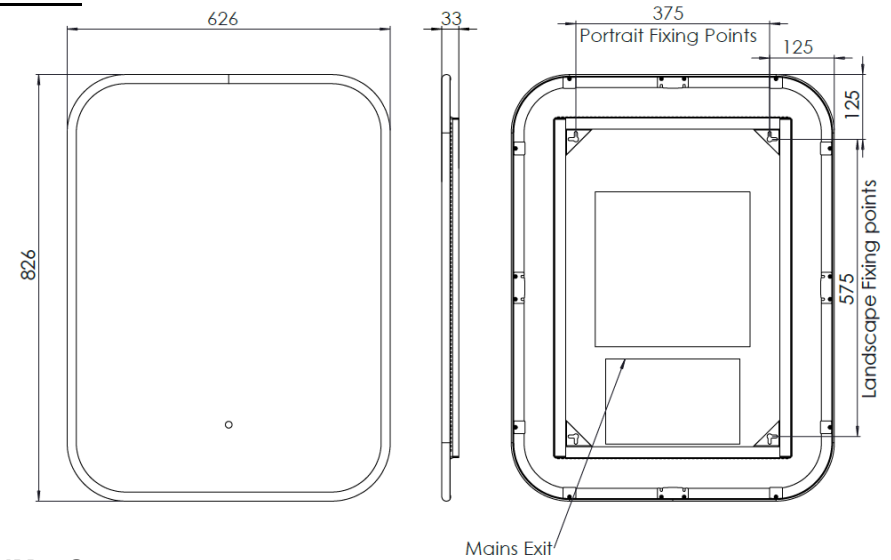


SNM60C

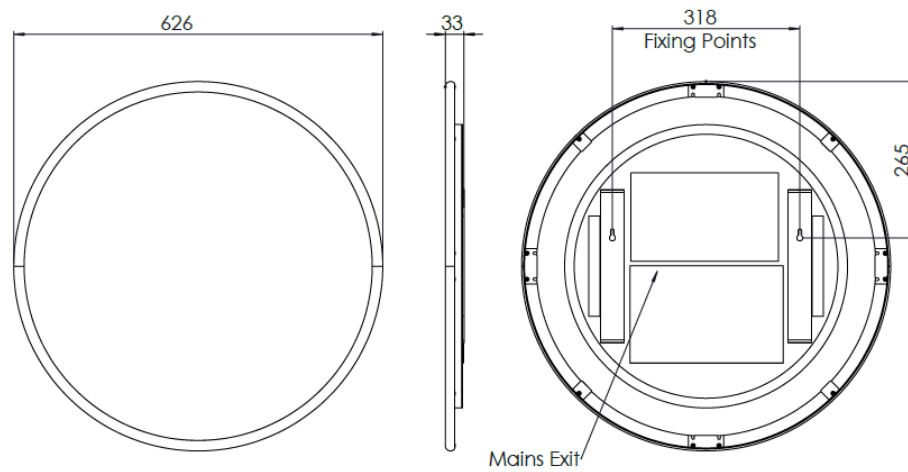

SNM80C

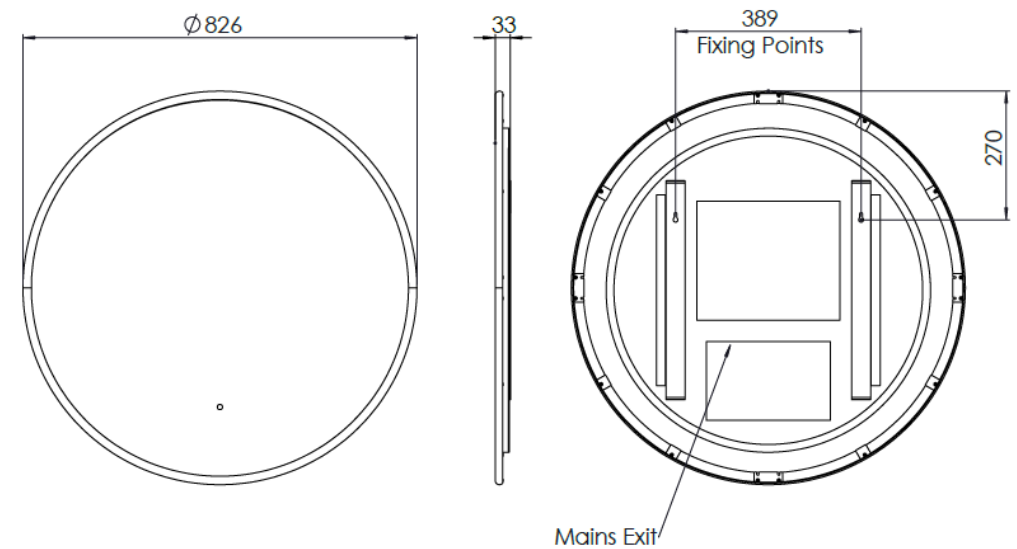

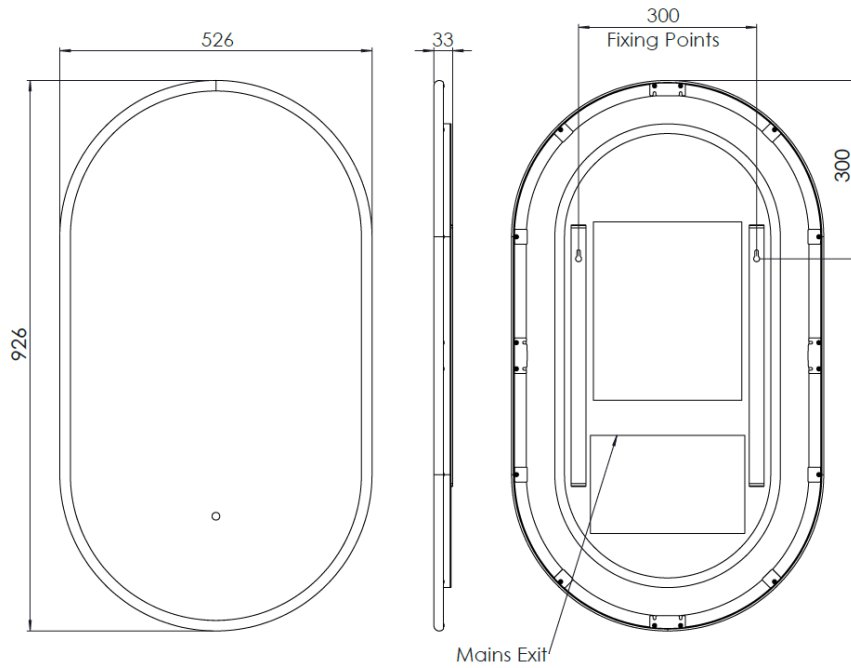SNM50P**SNM50A**