

TECHNICAL DATA SHEET

ZEPHYR MIRRORS

BOX CONTENTS:

ZEPHYR Mirror | Instructions booklet | Fixing Kit (2 Wall Brackets and Fixing Screws)

FAQ's	ZYM5010P	ZYM60C	ZYM80C
Can the mirror be hung landscape?	N	NA	NA
Does this mirror have frosting?	Yes		
What is the thickness of the mirror glass?	4mm		
Where is the switch sensor located?	Bottom Centre		
Is this mirror IP44 Rated?	Yes – Suitable for use in bathroom zone 2		
Can the LED lighting be replaced?	No		
Can the switch sensor be replaced?	Yes		
What size fuse should I use?	Seek the advice of an electrician		
How do I turn ON the demister pad?	The demister pad will turn ON/OFF when the mirror lights are turned ON/ OFF. To activate or deactivate the demister pad independently, press the right touch sensor with the demister icon. When the demister sensor icon light is ON the antifog function will be active. Demister automatically turns off after 60 minutes. See user manual for more information.		
Where is the demister pad located?	Please refer to technical drawings for demister pad location.		
Are illuminated cabinets/mirrors supplied with mains cable?	All illuminated mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.		

TECHNICAL DATA SHEET

ELECTRICAL SPECIFICATION


	Input Voltage	Lamp Type	Total Wattage (W)	Demist (W)	Demist Size (mm)	LEDs (W)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class	Max LED Output (lm)	Max Product Output (lm)
ZYM60C	220-240V 50Hz	12V DC LED Lamp	34.5	16.0	250*250	18.5	E	2700-6400	85	IP44	Class II	2189	2147.80
ZYM80C	220-240V 50Hz	12V DC LED Lamp	59.0	35.0	310*450	24.0	E	2700-6400	85	IP44	Class II	2880	2712.60
ZYM5010P	220-240V 50Hz	12V DC LED Lamp	65.5	40.0	350*450	25.5	E	2700-6400	85	IP44	Class II	3053	2943.80

Please note:


- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- We recommend to position the wall brackets at the measured distance minus 5mm to give some tolerance on hanging the mirror.

TECHNICAL DRAWINGS

ZYM60C

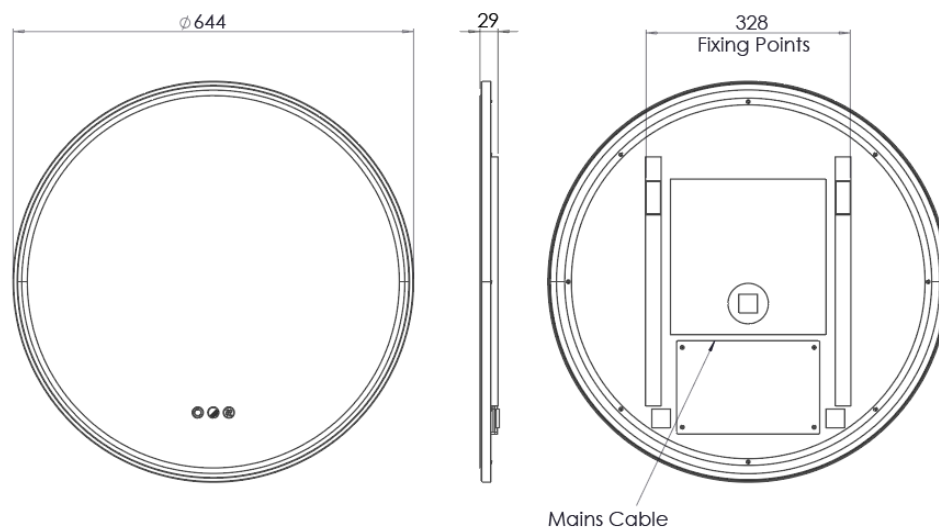


ZYM80C

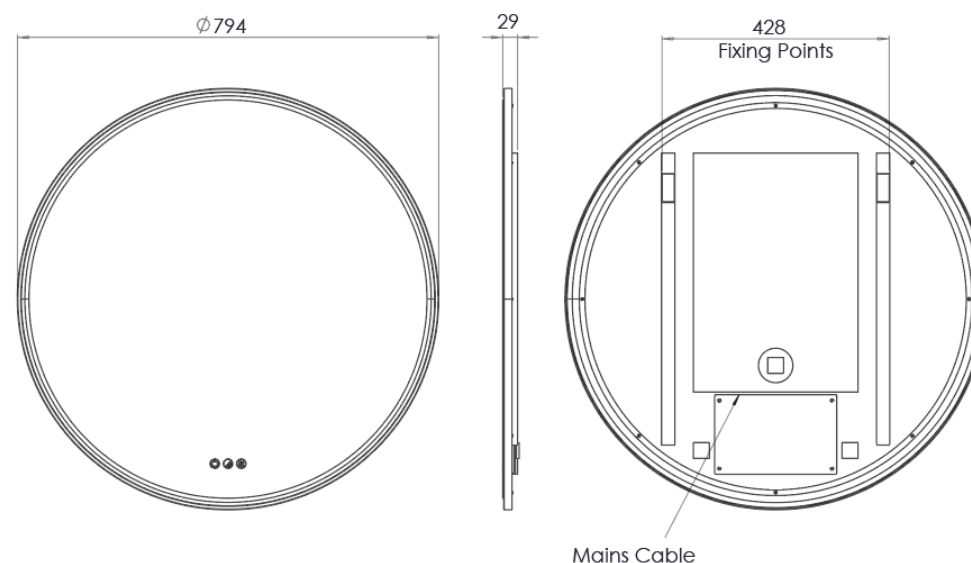

TECHNICAL DATA SHEET

TAVISTOCK

ZYM5010P

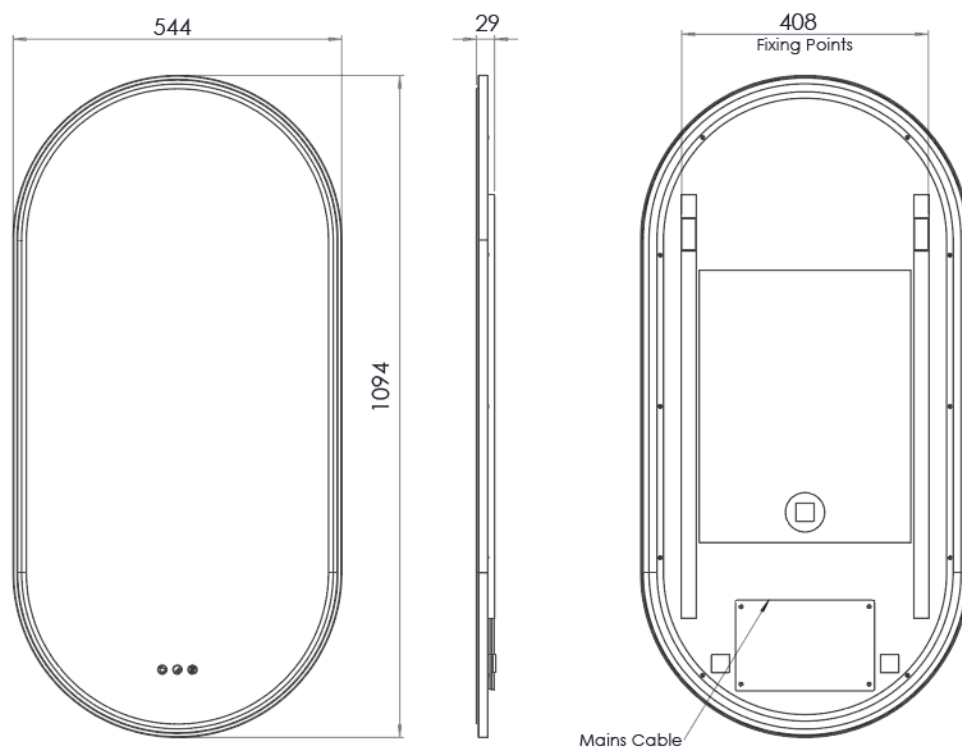

MATERIALS

4mm Glass, PVC Backed

Aluminium Frame

Silicon LED diffuser