

Customer Services, Brassmill Lane Trading Estate, Bath BA1 3JF.
Tel 01225 303900 | www.r2bathrooms.co.uk

PURE

LED Illuminated Mirror
Installation & Aftercare Instructions


Retain for future reference

Electrical Safety


Suitable for UK Installations only.

All fittings must be installed by a competent person, in accordance with current IEE wiring regulations. If in doubt consult a qualified electrician.

Important: Always switch off the electrical supply at the mains before installation and maintenance. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation commences.

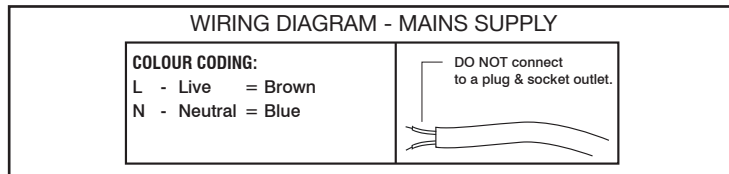

Bathroom Zones

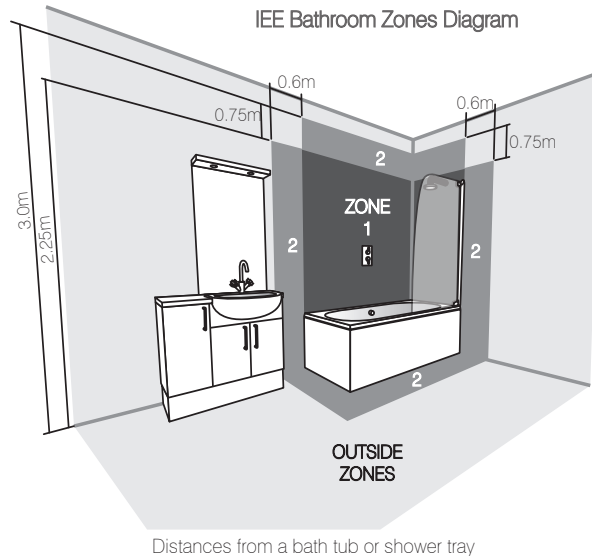

Bathroom fittings are subject to the appropriate zones in accordance with IEE Regulations. This product is only suitable for permanent indoor installation in Zone 2 and outside zones. (See above) This product is not suitable for installation in Zone 0 or 1, saunas, steam rooms or shower cubicles. Do not connect to a trailing plug and socket. Do not install onto surfaces that are either damp or electrically conductive.

After Care Service

Cleaning your product

When cleaning the mirror or any mirrored surfaces it is recommended to use a soft, dry, non abrasive cloth with the mirror turned off. Do not use cleaning agents or abrasive materials.

Do not allow moisture to come into contact with any electrical components.

Troubleshooting & After care service

For any further assistance, please contact our tech support team at: 01225 303900.

We reserve the right to amend the specification of its products at any time if an opportunity to improve the product occurs. All dimensions are approximate and are quoted within reasonable tolerances.

Compliance

This product complies with all relevant British and European safety standards. This product contains light source(s) of energy class F (EU) 2019/2020 and (EU) 2019/2015



Installation Procedure


3) Drill the marked out positions and fit the wall plugs accordingly. Fix the screw into position, leaving the screw head approx. 7mm proud of the wall for hanging.

4) Make the electrical connection from the mirror to the mains supply. Use the connection wire found at the rear of the mirror to make the necessary connections in accordance with the current IEE regulations. A second person will need to hold the mirror in place whilst electrical connections are made.

5) The mirror should easily slide onto the fixing screws and secure into place.

NOTE: To secure the mirror further, a small amount of silicone sealant can be applied to the side of the extrusions to prevent the mirror being accidentally pulled away from the wall.

To remove the mirror, the mirror should first be lifted and then pulled away from the wall.

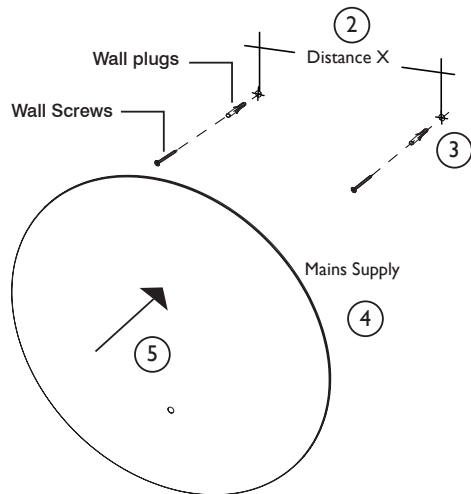


Operating Instructions

The mirror comes with LED lighting and heated demister Pad, which is controlled via a fixed **IR sensor**. The lighting can be controlled using the button functions detailed below:

Turn Mirror ON/OFF


To turn the product on/off, slowly wave your hand in front of the IR sensor. When the product is on, the heated demister will turn on.

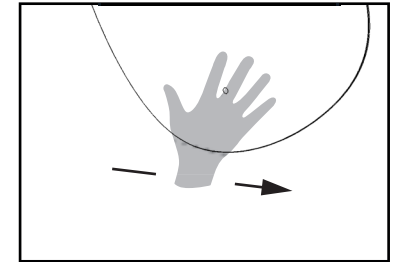

Change LED colour

1. When the mirror is OFF
2. Hold your hand in front of the IR sensor to adjust the colour temperature.
3. Remove hand from IR sensor once desired colour temperature is achieved.

Note: The colour temperature will be memorised.

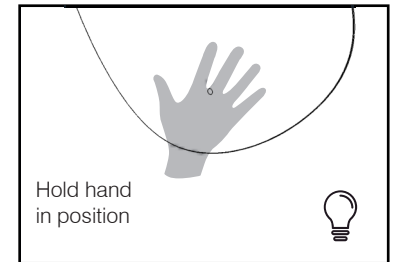


Warm	Natural	Daylight
White	White	White
2700K	4000K	6000K

Change LED intensity

1. When the mirror is ON
2. Hold your hand in front of the IR sensor to adjust its brightness.
3. Remove hand from IR sensor once desired intensity is reached.

Note: The brightness will be memorised.

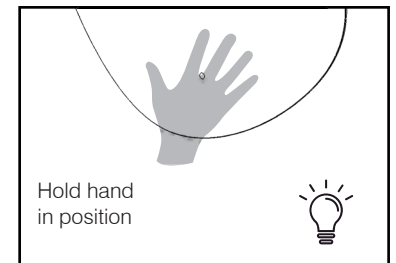

< 10% 100%

Installation Procedure

Important: Before starting the installation process, make sure the electrical supply is switched off. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit.

Important: Before starting the installation process, ensure the wall construction is suitable and can support the weight of the mirror.

Note: The wall plugs supplied are suitable for solid stone / brick walls. For any other wall material use specialist wall plugs.

- 1) Measure the distance (X) between the keyhole slots on the back of the mirror.
- 2) Mark out the fixing screw positions on the wall using a pencil to the desired height, ensuring they are spaced at distance (X).

Installation Procedure

For PRM70B, take extra care to measure the correct distance (X) between the keyhole slots. For more guidance on hanging orientations, see the table below.

IMPORTANT: It is essential that the hanging orientations outlined below are followed. DO NOT attempt to hang PRM70B on a single hanging bracket.

	Keyhole Distance (X)	Mirror Orientation
600 Orientation		
700 Orientation		
800 Orientation		

NOTE: Once on the wall, test the screws align with the keyholes. While supporting the mirror weight, slowly pull the mirror away from the wall. If the mirror is hung correctly, the mirror will remain on the wall.