

# Technical Data Sheet

# ROPER RHODES®

## Storm Shower Systems

No.	Description	Code	Fixings Included
1	Storm Dual Function Shower System With Accessory Shelf	SVSET37	YES





Inlet Pressure	Flow Rate (l/min)
1bar	23.40
2bar	33.09
3bar	34.80
4bar	46.80
5bar	51.85

Flow from valve may vary depending on accessories and domestic supply.

## Components - SVSET37

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

- Surface Mounted Top Outlet Bar Valve (with Quick Fixing Kit) - SV2207
- Height Adjustable Rigid Riser Rail with Diverter - SVARM07
- 220mm Shower Head - SVHEAD18
- Single Function Shower Handset - SVHEAD24
- Brass Shower Hose - SVHOSE01

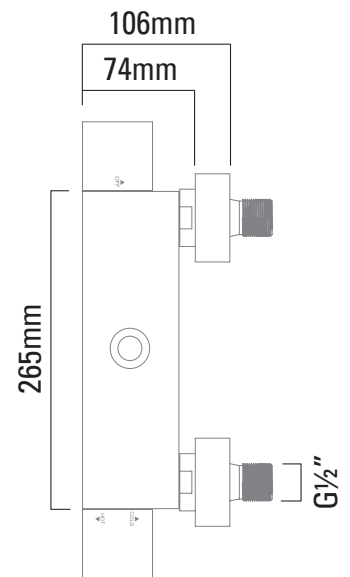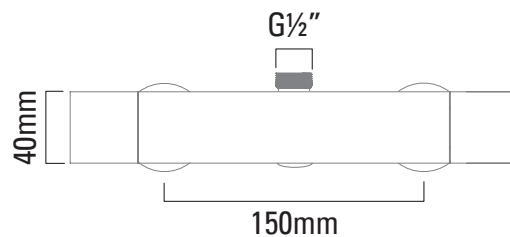

## FAQs

**How tall is the riser rail?** Adjustable from 958 - 1440mm

**How long is the shower hose?** 1.5m

**What is the minimum pressure for the valve?** 1.0bar

**What is the distance between the valve front and the wall when mounted?** 106mm

**What is the total bar valve height?** 40mm

**What is the valve connection size?** 1/2"

**What is the distance between the wall bracket and the head center?** 400mm

**Maximum slider adjustment?** 450mm

**Distance from wall to fixed head center?** 400mm

**Drop distance from rail top to overhead thread bottom?** 90mm