

ROPER RHODES[®]

Technical Data Sheet

Event-Click Triple Function Push Button Shower Valve

SV321703 (Black) SV321704 (Brass)




FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	1 BAR
Pressure:	Flow Rate (l/min)
1 BAR	10.1
2 BAR	15
3 BAR	18.4
4 BAR	20.5

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

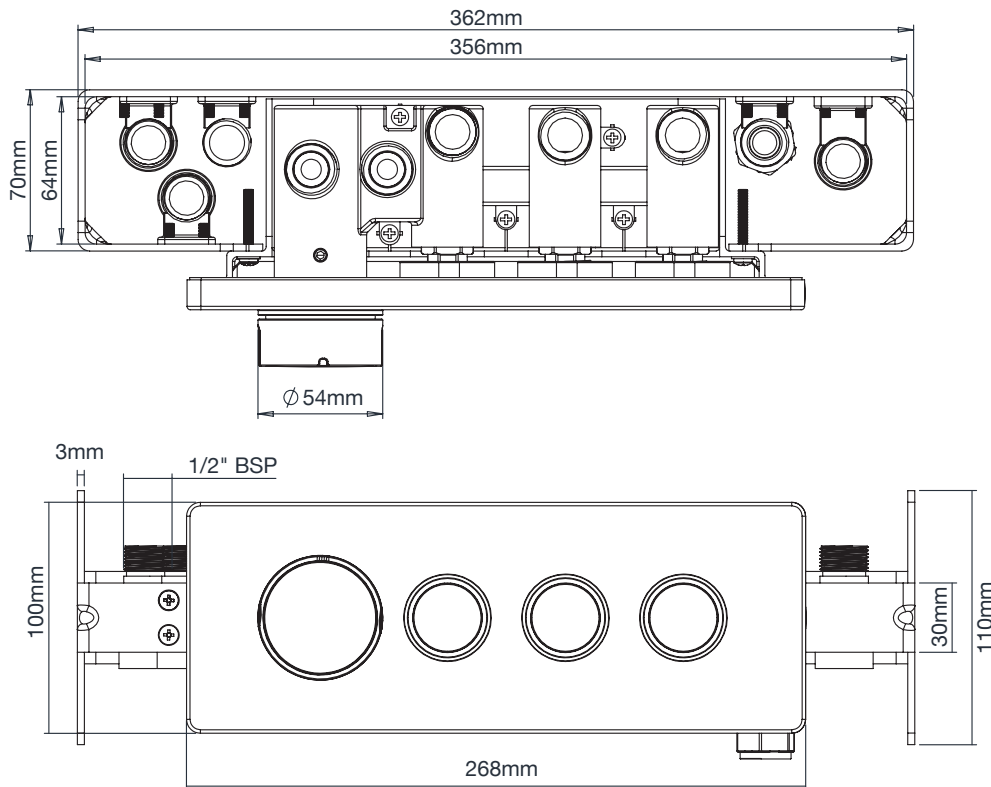

FAQs

What is the recommended operating pressure? 1.0bar

What is the size of the connections? The valve uses 1/2" connections

Can the system be mounted vertically and horizontally? Yes

Can I have all shower options on at the same time? Yes, all outlet options can be used simultaneously

What size pipework do I need? 15mm

Is it suitable for stud walls? It is recommended you use CLS size 89mm depth within the wall

Does the valve include isolation points? Yes