


Walcot Dual Function Shower Valve

SV510904 (Brushed Brass) SV510906 (Brushed Nickel)

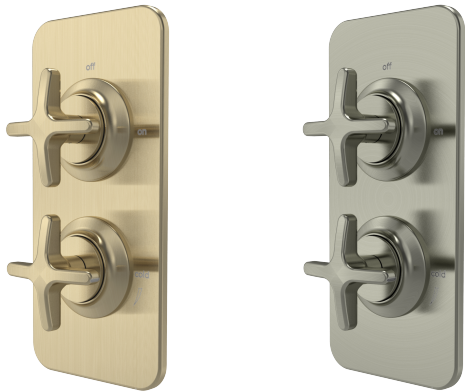


FLOW RATE DATA IS TESTED UNDER
LABORATORY CONDITIONS: ACTUAL
FLOW RATE MAY VARY DEPENDING ON
DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	1 BAR
Pressure:	Flow Rate (l/min)
1 BAR	9.5
2 BAR	13
3 BAR	16

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

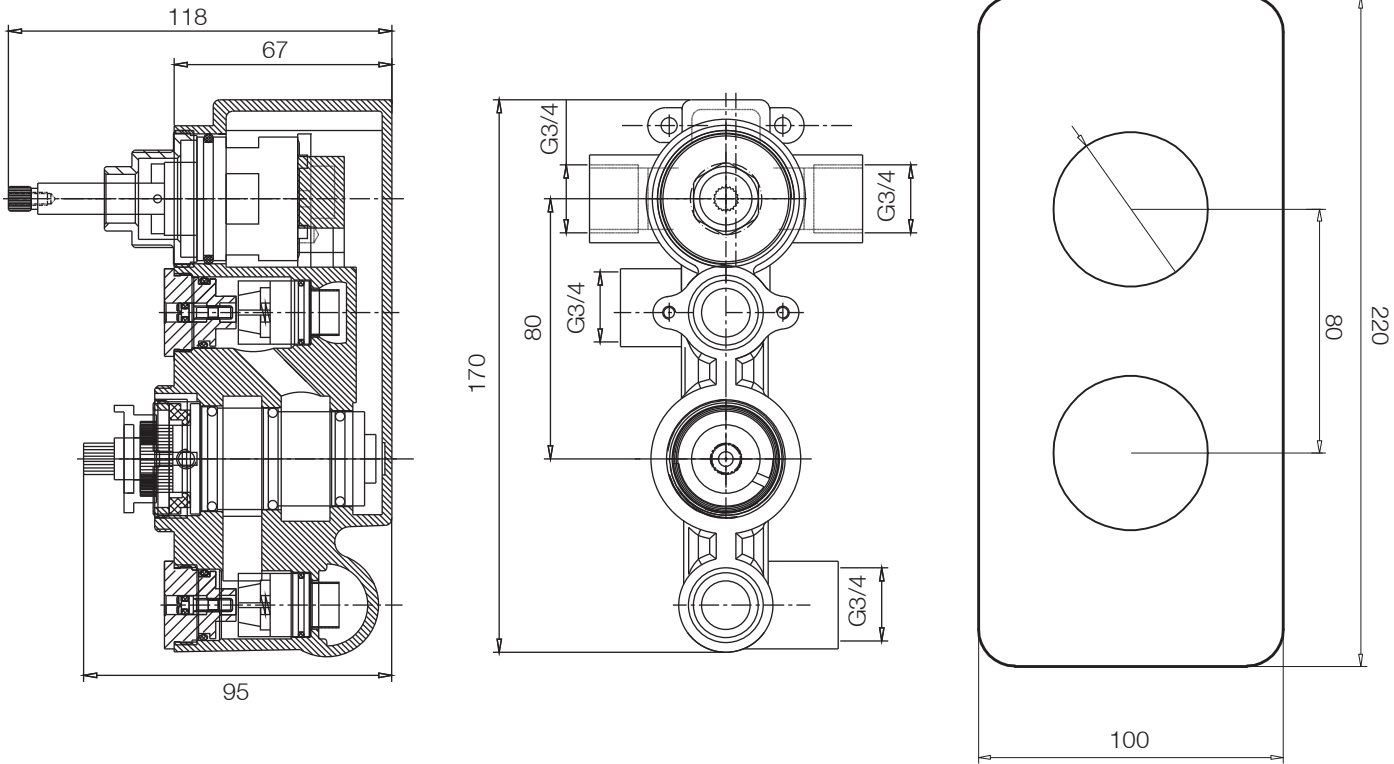

FAQs

- What are the size of the inlet and outlet connections?** The inlets and outlets on this valve are 3/4"
- What is the minimum recommended operating pressure?** We recommend a minimum of 1BAR pressure from your plumbing supply.
- Does the valve include isolation points?** Yes, this valve has two isolation points on the hot and cold feeds.
- What is the maximum recommended temperature for the valve to be set at?** We recommend no higher than 42 degrees celsius.
- Can this product be mounted vertically or horizontally?** This valve can only be mounted vertically.
- Can both functions be selected at the same time?** No, only one outlet can be selected at once.
- How should I clean this product?** We recommend using only a damp cloth and warm water. Do NOT use abrasive cleaning products.