

Technical Data Sheet

ROPER RHODES®

Storm Shower Systems

No.	Description	Code	Fixings Included
1	Storm Dual Function Shower System	SVSET02	YES




FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES

Inlet Pressure	Flow Rate (l/min)
1bar	23.20
2bar	32.80
3bar	34.90
4bar	46.40
5bar	51.41

SVSET02

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

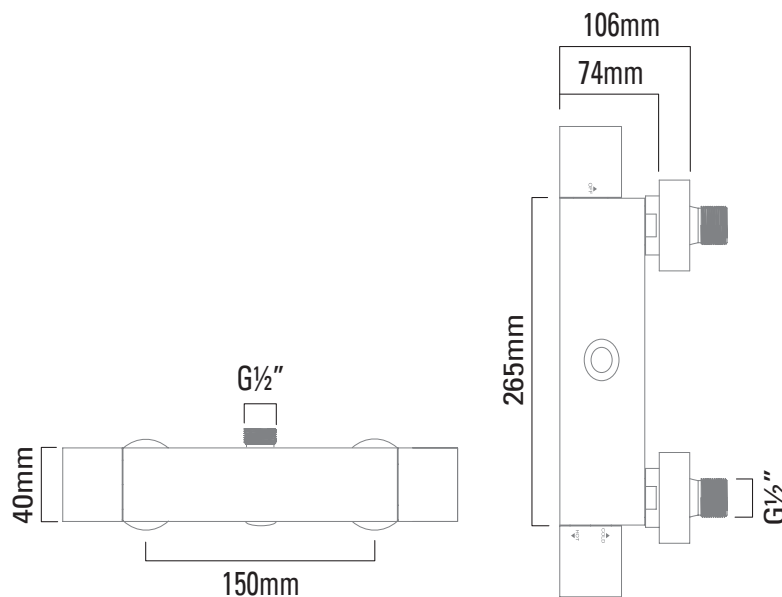

FAQs

- How tall is the riser rail?** Adjustable from
- How long is the shower hose?** 1.5m
- What is the minimum pressure for the valve?** 1.0bar
- What is the distance between the valve front and the wall when mounted?** 106mm
- What is the total bar valve height?** 40mm
- What is the valve connection size?** 1/2"
- What is the distance between the wall bracket and the head centre?** 400mm

Components

- Thermostatic Top Outlet Bar Valve - SV2207
- Height Adjustable Rigid Riser Rail with Diverter - SVARM07
- 220mm Shower Head - SVHEAD18
- Single Function Shower Handset - SVHEAD24
- Brass Shower Hose - SVHOSE01