Technical Data Sheet


ROPER RHODES[®]

Shower Systems

No.	Description	Code	Fixings Included
1	Recite Dual Function Shower System - Chrome	SVSET172	YES
		FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES	
	des -	Minimum Pressure:	0.5BAR
		Inlet Pressure	Flow Rate (l/min)
		0.2bar	4
		0.3bar	5
		0.5bar	7
		1bar	8.5
\bigcirc		2bar	11.5

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

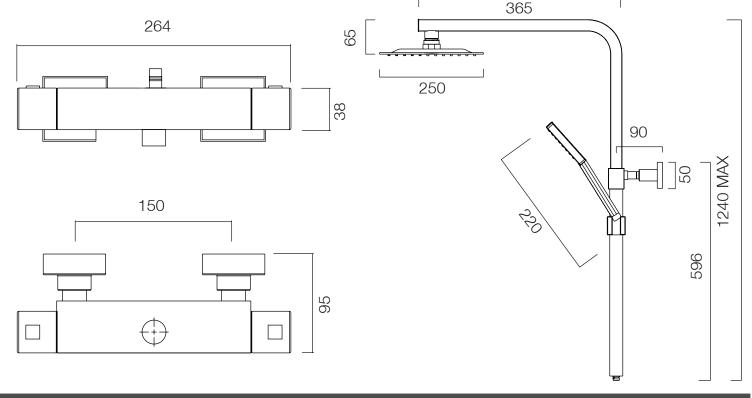

FAQs

How tall is the riser rail? Adjustable height - maximum 1240mm

How long is the shower hose? 1.5m

What is the minimum recommended pressure for the valve? 0.5BAR

What is the valve connection size? 3/4" threaded inlets / 1/2" threaded outlet

Components

Chrome Plated Stainless Steel Riser Chrome Plated Zinc Valve Chrome Plated Stainless Steel Cover Plates Chrome Plated ABS Slider PVC Shower Hose Chrome Plated ABS Handset

Technical Data Sheet


ROPER RHODES[®]

Shower Systems

No.	Description	Code	Fixings Included
1	Recite Dual Function Shower System - Black	SVSET167	YES
		FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES	
		Minimum Pressure:	0.5BAR
		Inlet Pressure	Flow Rate (I/min)
		0.2bar	4
		0.3bar	5
		0.5bar	7
		1bar	8.5
\bigcirc	\bigtriangledown	2bar	11.5

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

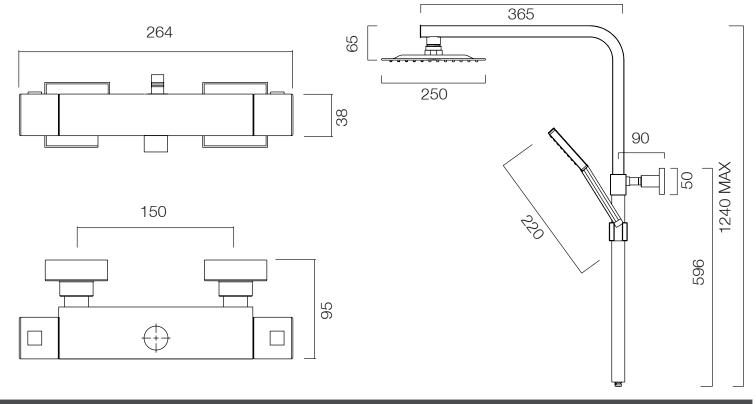

FAQs

How tall is the riser rail? Adjustable height - maximum 1240mm

How long is the shower hose? 1.5m

What is the minimum recommended pressure for the valve? 0.5BAR

What is the valve connection size? 3/4" threaded inlets / 1/2" threaded outlet

Components

Black Electroplated Stainless Steel Riser Black Electroplated Zinc Valve Black Electroplated Stainless Steel Cover Plates Black Electroplated ABS Slider PVC Shower Hose Black Electroplated ABS Handset

Technical Data Sheet


ROPER RHODES[®]

Shower Systems

No.	Description	Code	Fixings Included	
1	Recite Dual Function Shower System - Brass	SVSET169	YES	
		FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES		
		Minimum Pressure:	0.5BAR	
		Inlet Pressure	Flow Rate (I/min)	
		0.2bar	4	
		0.3bar	5	
		0.5bar	7	
		1bar	8.5	
		2bar	11.5	

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

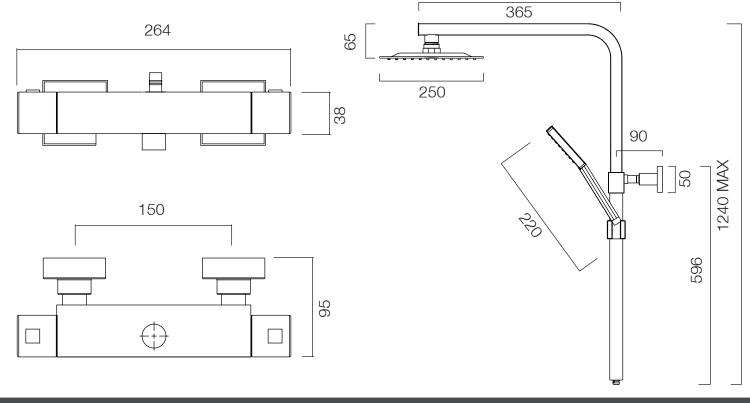

FAQs

How tall is the riser rail? Adjustable height - maximum 1240mm

How long is the shower hose? 1.5m

What is the minimum recommended pressure for the valve? 0.5BAR

What is the valve connection size? 3/4" threaded inlets / 1/2" threaded outlet

Components

Brass PVD Stainless Steel Riser Brass PVD Zinc Valve Brass PVD Stainless Steel Cover Plates Brass PVDABS Slider PVC Shower Hose Brass PVD ABS Handset