

Technical Data Sheet

ROPER RHODES®

Unity 2F Concealed Shower System Brass - SVSET173

No.	Description	Code	Fixings Included
1	Unity 2F Concealed Shower System Brass	SVSET173	YES




FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	1BAR
Inlet Pressure	Flow Rate (l/min)
1bar	11.6
2bar	17
3bar	21

Dimensions - SVSET173

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

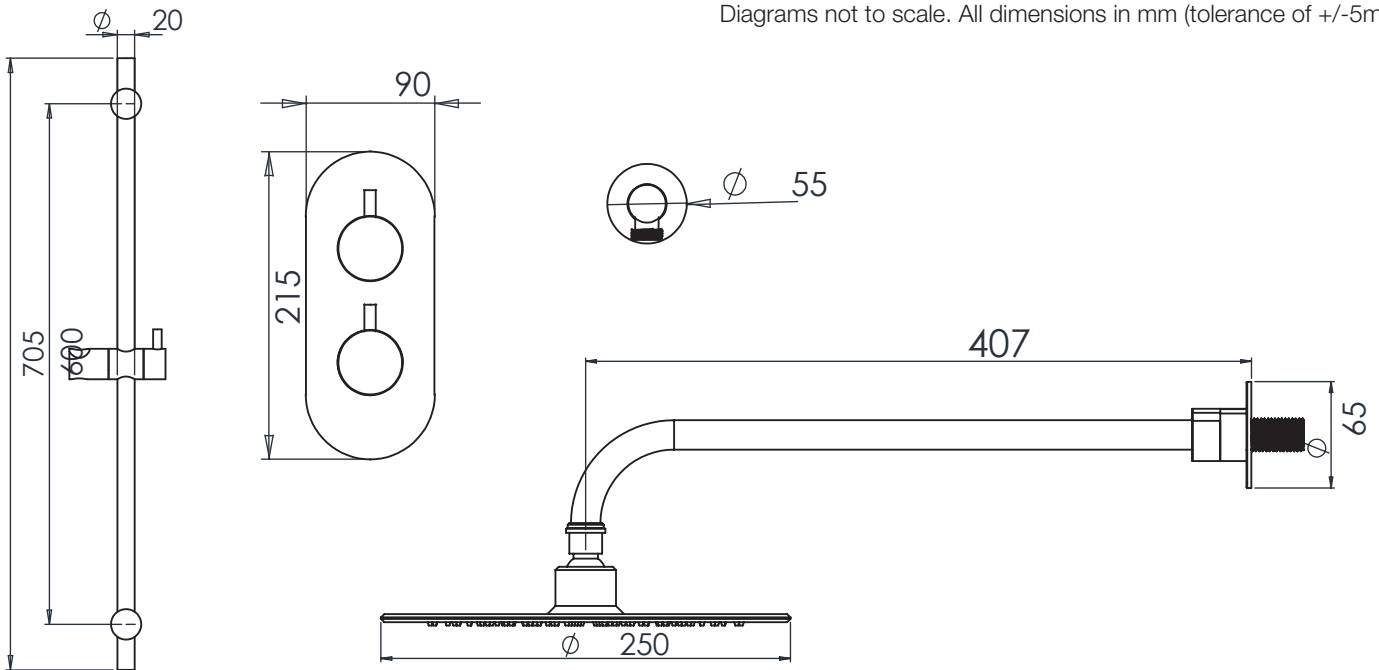

FAQs

What is the size of the connections? The valve uses 1/2" connections.

What size Pipework do i need? 15mm

Is it suitable for stud walls? It is recommended you use CLS size 89mm depth within the wall

Does the valve include isolation points? Yes

What is the recommended operating pressure? 1.0bar

Components

- Valve - RR20
- Brass Cover Plate - SVCOMP18
- Brass Valve Handle - SVHANUN.BR
- Riser rail - SVRAIL14
- Handset - SVHEAD53
- Hose - SVHOSE05
- Brass Wall Elbow - SVACS27
- Adjustable Shower arm - SVARM16
- Stainless Steel Shower Head - SVHEAD52