

ROPER RHODES®

Technical Data Sheet

Unity Triple Function Concealed Shower System With Riser Rail, Shower Head And Smartflow

SVSET195 (Chrome) SVSET196 (Black) SVSET197 (Brass)




FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	0.5 BAR
Pressure:	Flow Rate (l/min)
0.5 BAR	10.1
1 BAR	14.3
2 BAR	21
3 BAR	25.9

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

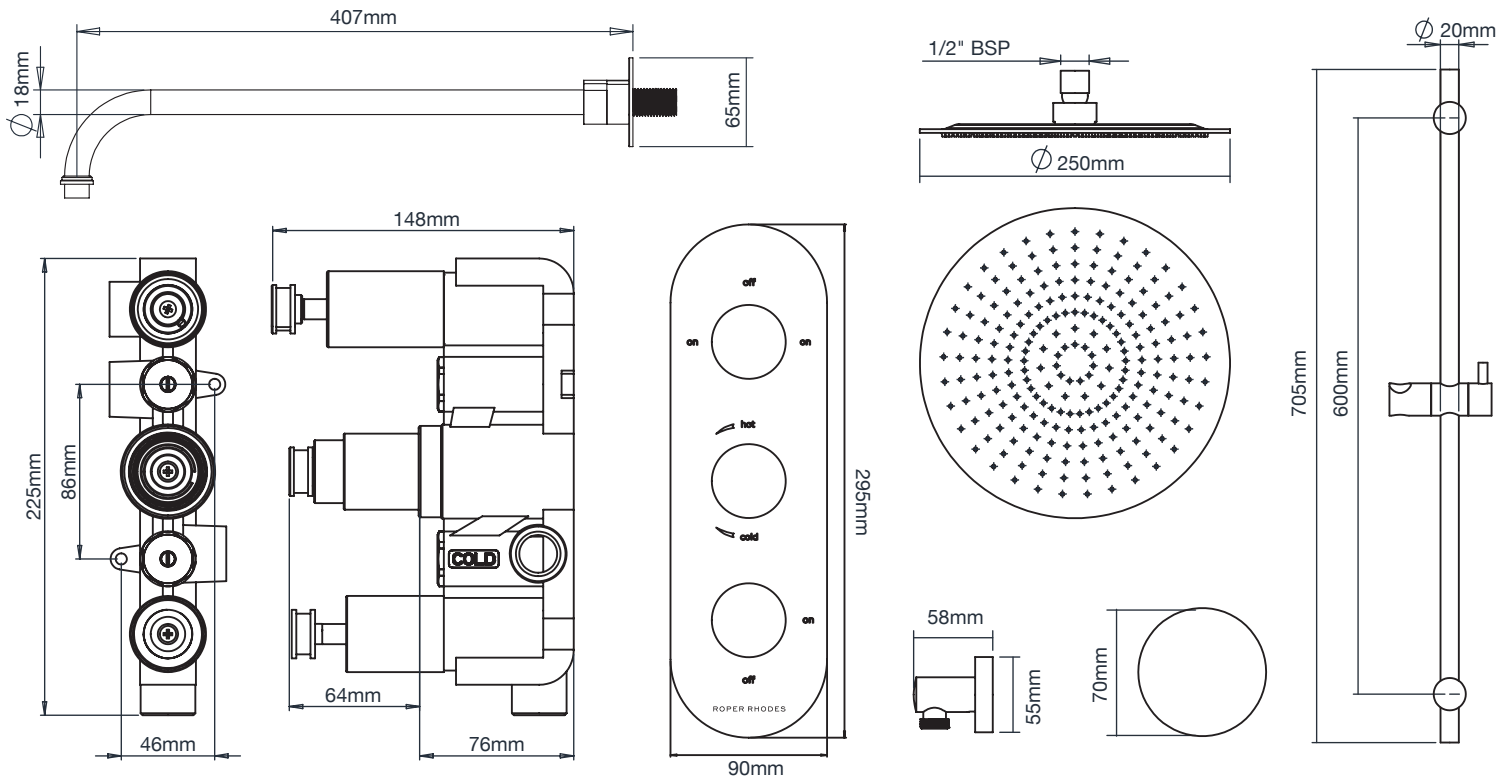

FAQs

What is the recommended operating pressure? 0.5 BAR

What is the size of the connections? 1/2" Outlets, 3/4" Inlets

What is the minimum cavity depth? 77mm

Can I have multiple shower options on at the same time? Yes, the outlet attached to the single diverter can be used simultaneously with one of the outlets on the the dual diverter

Can the shower arm length be adjusted? The shower arm can be cut to desired length