Technical Data Sheet

ROPER RHODES®

Walcot Dual Function Shower Sys With Handset Outlet And C.Head

SVSET224 (Brushed Brass) SVSET239 (Brushed Nickel)




FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	1 BAR
Pressure:	Flow Rate (I/min)
1 BAR	9.5
2 BAR	13
3 BAR	16

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

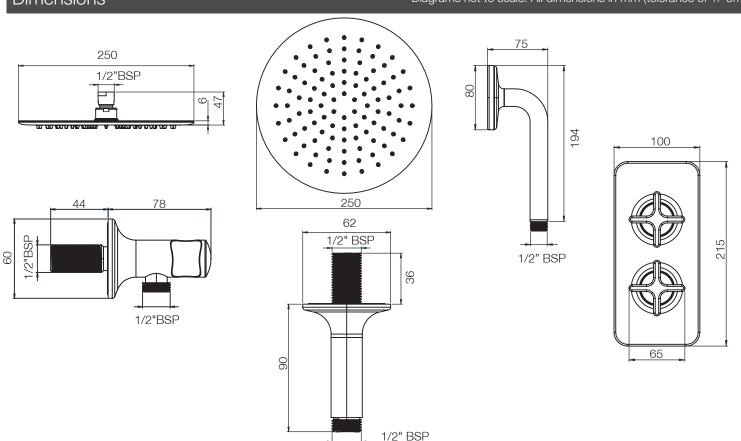

FAQs

What is the size of the connections? The valve uses 1/2" connections.

Can I have both shower options on at the same time? Yes

What size Pipework do i need? 15mm

Is it suitable for stud walls? It is recomended you use CLS size 89mm depth within the wall

Does the valve include isolation points? Yes

What is the recomended operating pressure? 1.0bar

Can the system be mounted vertically and horizontally? Yes