

ROPER RHODES®

Technical Data Sheet

Keswick Wall Mounted Mixer


T321902 (Chrome) T321904 (Brass)




FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES

Minimum Pressure:	0.2 BAR
Pressure:	Flow Rate (l/min)
0.2 BAR	10.2
0.3 BAR	11.2
0.5 BAR	13.5
1 BAR	15.6

Dimensions

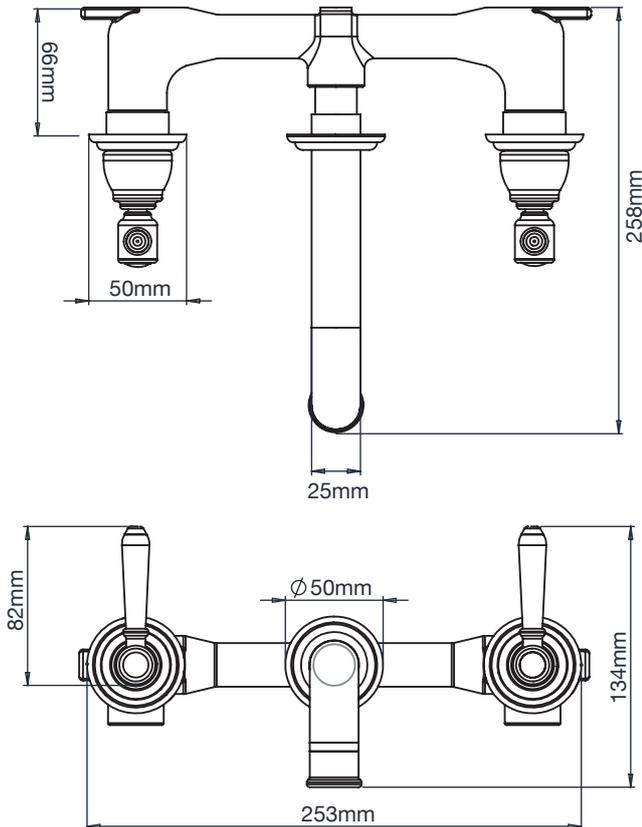

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

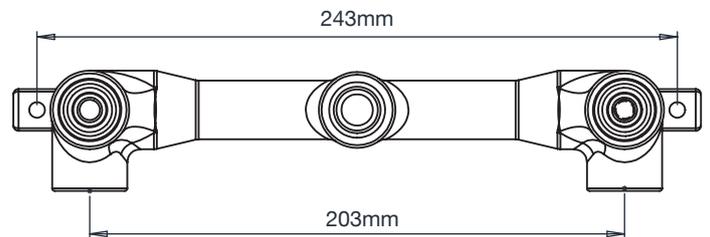

FAQs

What is the recommended operating pressure? 0.2 bar

What is the size of the connections? 1/2" female threaded inlets

What size pipework do I need? 15mm

What is the minimum / maximum cavity depth? 58 - 66mm depth.

Can the aerator be replaced? Yes, the aerator is removable for cleaning and replacement

Is a click waste supplied with the product? No, this can be purchased separately