Technical Data Sheet

TAVISTOCK

Cohort Cross Bath Shower Mixer

TCC42 (Chrome), TCC4204 (Brushed Brass), TCC4205 (Gunmetal)


FLOW RATE DATA IS TESTED UNDER LABORATORY CONDITIONS: ACTUAL FLOW RATE MAY VARY DEPENDING ON DOMESTIC SUPPLY AND ACCESSORIES



Minimum Pressure:	0.5 BAR
Pressure:	Flow Rate (I/min)
0.5 BAR	12
1 BAR	15.79
2 BAR	22.73
3 BAR	28

Dimensions

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

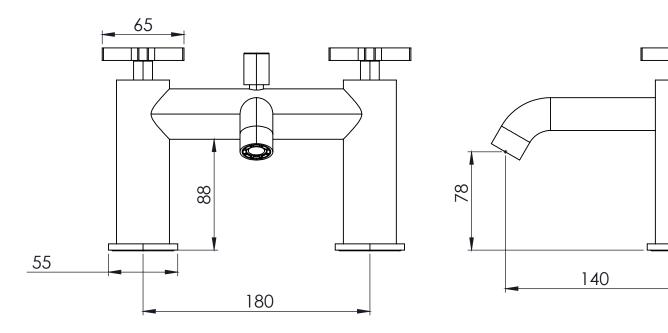

FAQs

What size are the connections? This tap uses 3/4"BSP threaded inlets. The shower outlet is 1/2" BSP.

What size pipework do i need? It is recommended to use 22mm pipework with G3/4" plumbing fittings.

What is the recomended operating pressure? 0.5 BAR.

How do I care for the finish on this tap? We recommend using only a damp cloth and warm water. Do NOT use abrasive cleaning products or cleaning chemicals as this may damage the surface of the product.

9