




Installation with a concealed cistern

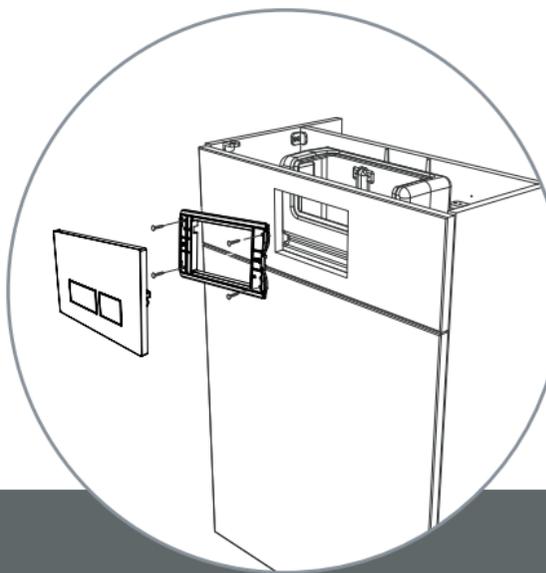


Cut aperture 172 mm x 105mm.  
Check for obstructions before cutting.  
Screw mounting bracket  
to the unit

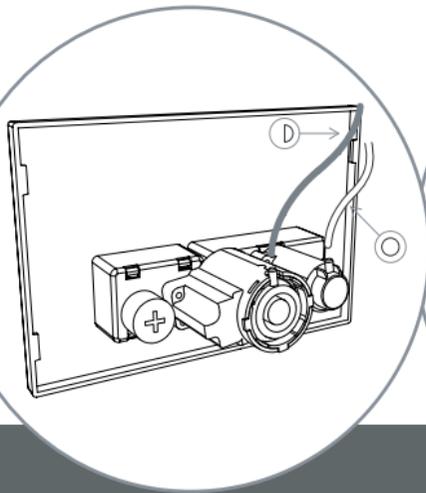

Connect the hoses in the  
correct positions

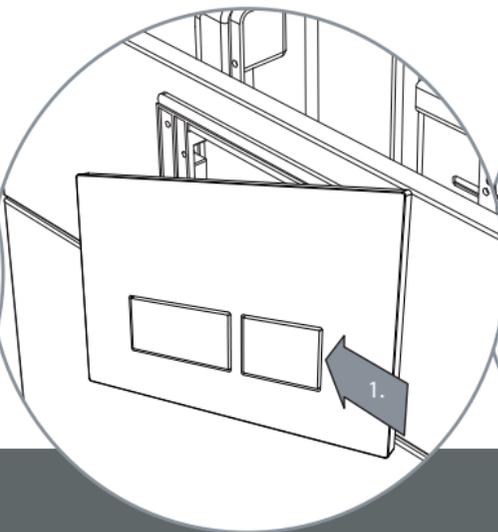

Locate right side of flush plate  
onto the mounting bracket  
and push to the left

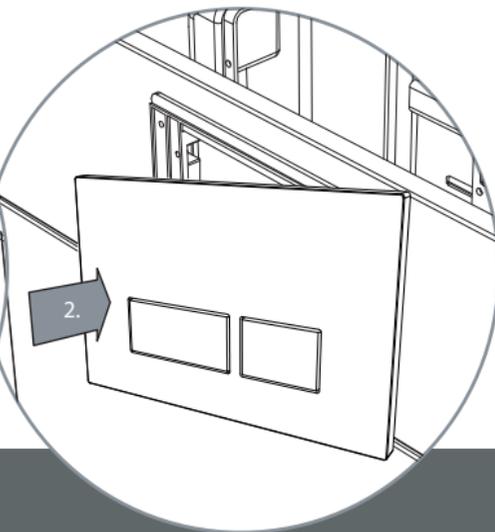

Push flush plate inward  
to secure in place

For installation with a wall hung frame or in-wall cistern, please refer to the product instructions.

compatible with the following cisterns & wall hung frames:

- TR9001 torrent cistern
- TR9002 cascade cistern
- VOR790 vortex cistern
- APX790 apex cistern
- TR9005 / WHF082 0.82m wall hung frame
- TR9006 / WHF117 1.17m wall hung frame
- TR9009 / VOR620 in-wall cistern



Brought to you by the Roper Rhodes Group  
Brassmill Lane Trading Estate, Bath, BA1 3JF  
t: 01225 303900