


# Technical Data Sheet

## TYPE / STATUS SOLID SURFACE WORKTOP

What's in the box: 1x TYWT5S.x / TYWT6S.x / TYWT8S.x

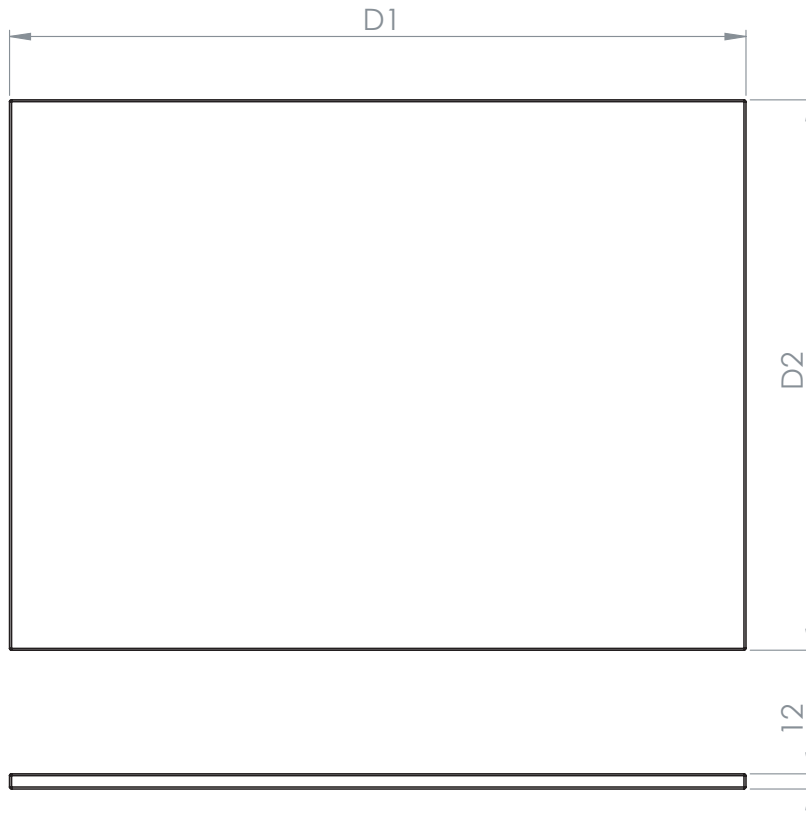

Unit	D1	D2
500	480mm	384mm
600	583mm	435mm
800	774mm	435mm

### Materials

Basin: Isocast

Diagrams not to scale  
All dimensions in mm  
Tolerance of +/-5mm

\*\*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

\*\*\*Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

## Solid Surface Information

Has many names including:

- Corian
- LG Hi-macs

A homogenous compound mixture of polyester and aluminium trihydrate (derived from a natural Bauxite ore). Basically the same material all the way through so can be cut and sanded back to perfect finishes. Aluminium trihydrate is Moulded, vacuum treated and then finished by hand to create a perfectly smooth matt finish which is highly dimensionally accurate. Can be sanded and refinished should any stains occur due to misuse. Can be patch repaired by simple sanding back since material is homogenous (same all the way through).

Material Benefits:

- Point impacts (255g ball dropped from 610mm)
- Stain resistant
- Colourfast
- Temperature resistance

## FAQs

Q: Are the worktops pre-cut for tap and waste hole?

A: No, they are plain and should be cut according to basin / tap selected. Instruction supplied with worktops to detail

Q: Are the worktops reversible?

A: No, the top (main finish) is polished. Underside is unfinished.

Q: Can I use these worktops on other ranges?

A: They are designed to be perfect fit to R2 range but it is possible to cut down and repolish edges if required.