
## Technical Data Sheet

## SOLO BASIN 1200 STD

What's in the box: 1x SO1202S.L or SO1202S.R

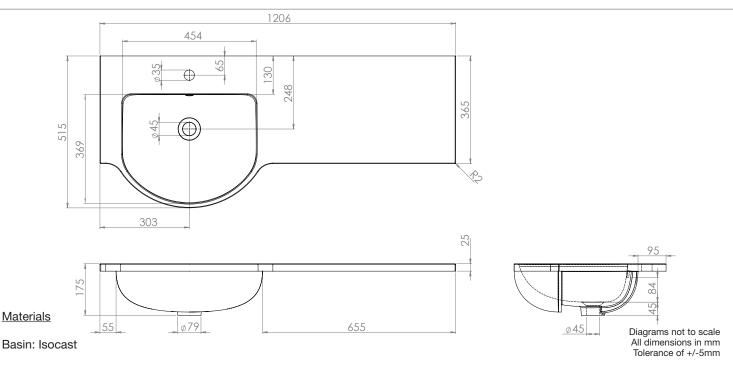

\*\*Dimensions are subject to change, customers are advised to measure actual product before commencing installation. \*\*\*Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

## Isocast Information

Has many names including:

- Gelcoat
- Cultured marble
- Cast mineral marble
- Synthetic marble

Base material is 70% natural (aggregate dolomite rock - calcareous magnesium carbonate). A misconception is that this material is completely manmade. The other 30% is a mixture of various polyester resins.

A 1.5 - 2.0mm Top coating of "gelcoat" which is the proprietary name for the polyester resin used to seal all top faces of the basin / worktop. Fully tested against multiple stains which can either be removed with standard cleaners (autosol for example) or the specialist clean and shine repair kits.

## FAQs

- Q: What is the maximum water depth of the basin?
- Q: What is the width of the Tapledge?
- Q: What is the distance from the Taphole centre to Basin Waste?
- Q: Are fixings supplied?
- Q: Does the basin fit other furniture?
- Q: Does the basin have an overflow?
- Q: What are the taphole/ basin waste sizes?

- A: 84mm up to the overflow.
- A: The Tapledge is 130mm wide.
- A: 183mm.
- A: No.
- A. No. This basin is fit with R2 fitted furniture range only.
- A. Yes. An intergrated overflow.
- A: All sizes are to British Standard (BS EN 31)
- Diameter of the central tap hole = 35mm : +2/ -1mm
  - Bore of the waste outlet hole = 46mm : +2 / 3mm
- Diameter of the base for the seal between the waste outlet hole and the waste fitting = ≥ 60 mm