
Technical Data Sheet

SOLO BASIN 1500 STD

What's in the box: 1x SO1500S.L or SO1500S.R

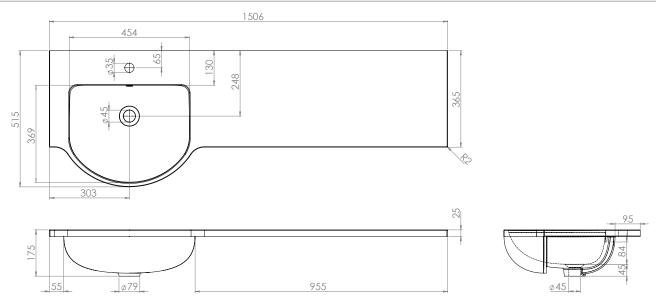

Materials

Basin: Isocast

Diagrams not to scale All dimensions in mm Tolerance of +/-5mm

Isocast Information

Has many names including:

- Gelcoat
- Cultured marble
- Cast mineral marble
- Synthetic marble

Base material is 70% natural (aggregate dolomite rock - calcareous magnesium carbonate). A misconception is that this material is completely manmade. The other 30% is a mixture of various polyester resins.

A 1.5 - 2.0mm Top coating of "gelcoat" which is the proprietary name for the polyester resin used to seal all top faces of the basin / worktop. Fully tested against multiple stains which can either be removed with standard cleaners (autosol for example) or the specialist clean and shine repair kits.

FAQs

Q: What is the maximum water depth of the basin? A: 84mm up to the overflow.

Q: What is the width of the Tapledge?

A: The Tapledge is 130mm wide.

Q: What is the distance from the Taphole centre to Basin Waste? A: 183mm.

Q: Are fixings supplied? A: No.

Q: Does the basin fit other furniture?

A. No. This basin is fit with R2 fitted furniture range only.

Q: Does the basin have an overflow?

A. Yes. An intergrated overflow.

Q: What are the taphole/ basin waste sizes? A: All sizes are to British Standard - (BS EN 31)

• Diameter of the central tap hole = 35mm: +2/-1mm

• Bore of the waste outlet hole = 46 mm : +2 / - 3 mm

• Diameter of the base for the seal between the waste outlet hole and the waste fitting $= \ge 60 \text{ mm}$

^{**}Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

^{***}Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.