


# TECHNICAL DATA SHEET

## Widcombe Doubled Ended Roll Top Bathtub - BAT102


# ROPER RHODES®

NO.	Description	Product Code	Fixings included	Gross Weight
1	Widcombe Doubled Ended Roll Top Bathtub	BAT102	YES	38KG
2	Traditional Lion Feet (Various Finishes)	BAA101-BAA104	YES	4.4KG

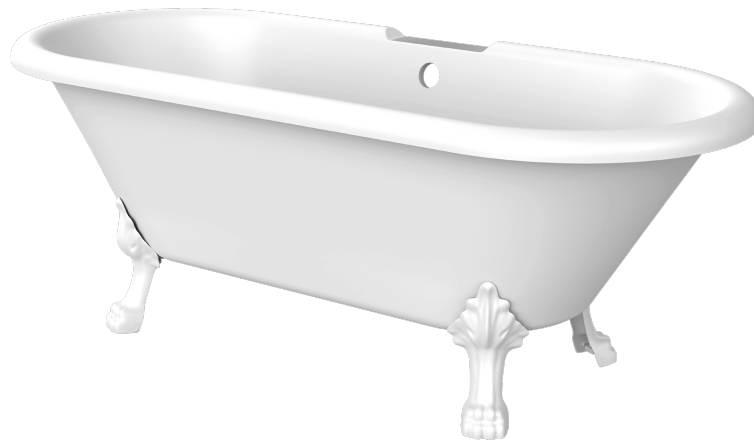

## DIMENSIONS

DIAGRAMS NOT TO SCALE | ALL DIMENSIONS IN MM TOLERANCE OF  $\pm 5$ MM  
ALL PRODUCTS CONFORM TO BRITISH STANDARDS

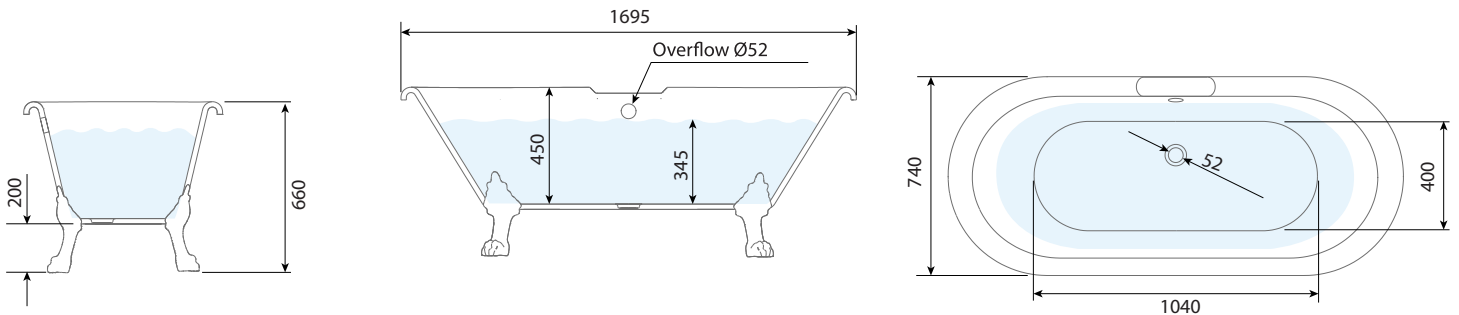

\*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

\*\*Fixing point dimensions are for guidance only. The positions of fixings must be checked when product is received.

## FAQs

### Q - What Trap is recommended for use with this bathtub?

A - We recommend using an exposed bath trap with this bath tub. The trap will require a 1 1/2" BSP connection to connect with the waste. A range of finishes are available in the Roper Rhodes bathing collection

### Q - Is this bathtub supplied with a waste?

A - No, bathtub click and chain wastes can be purchased separately from the Roper Rhodes brochure in a range of finishes.

### Q - What colour is the overflow trim?

A - The bathtub is supplied with a pre drilled, neutral overflow hole.

### Q - Do I need to purchase a bath tub overflow kit for this bath tub?

A - Yes, an overflow and waste kit can be purchased from the Roper Rhodes bathing collection in a range of finishes.

### Q - What filling methods are recommended for this bathtub

A - We recommend using a deckmounted bath filler/bath shower mixer with tap shrouds.

### Q - Is this bathtub supplied with feet?

A - No, traditional feet can be purchased separately from the Roper Rhodes brochure in a range of finishes.

### Q - How heavy is this bathtub?

A - The unfilled weight is 30KG, the filled weight is 214KG. A structural engineer should be consulted to ensure that your floor is strong enough to support the weight of a filled bathtub.

### Q - What material is used to make this bathtub?

A - This bathtub is made from a double skin of 3.2mm acrylic, each skin is reinforced by a double layer of insulating fibreglass and resin. The bottom of the bath tub is reinforced using a 6mm thick MDF base board.

### Q - Are the feet adjustable?

A - Yes, the feet are adjustable by a range of over 30mm.

### Q - What is the overall capacity of the bathtub?

A - 184 Litres.

### Q - Are the tap holes pre drilled?

A - Our bath tubs are all supplied with undrilled tap decks

All of our bath tubs conform with BS EN 14156 Class 1 & Class 2